

Power Quality

Power Factor Correction

Low Voltage components

Catalogue
2017



Your requirements....

Optimize energy consumption

- By reducing electricity bills,
- By reducing power losses,
- By reducing CO₂ emissions.



Increase power availability

- Compensate for voltage sags detrimental to process operation,
- Avoid nuisance tripping and supply interruptions.



Improve your business performance

- Optimize installation size,
- Reduce harmonic distortion to avoid the premature ageing of equipment and destruction of sensitive components.



Our solutions....

Reactive energy management

In electrical networks, reactive energy results in increased line currents for a given active energy transmitted to loads.

The main consequences are:

- Need for oversizing of transmission and distribution networks by utilities,
- Increased voltage drops and sags along the distribution lines,
- Additional power losses.

This results in increased electricity bills for industrial customers because of:

- Penalties applied by most utilities on reactive energy,
- Increased overall kVA demand,
- Increased energy consumption within the installations.

Reactive energy management aims to optimize your electrical installation by reducing energy consumption, and to improve power availability. Total CO₂ emissions are also reduced.

Utility power bills are typically reduced by 5 % to 10 %.



“Our energy consumption was

reduced by **9 %**

after we installed 10 capacitor banks with detuned reactors. Electricity bill optimised by 8 % and payback in 2 years.”

Testifies Michelin Automotive in France.

“Energy consumption reduced by

5 %

with LV capacitor bank and active filter installed.”

POMA OTIS Railways, Switzerland.

“70 capacitor banks with detuned reactors installed, energy consumption reduced by 10 %, electricity bill optimised by 18 %, payback in just

1 year.”

Madrid Barajas airport Spain.

“Our network performance improved significantly after we installed 225 LV Detuned capacitor banks. The capacitor banks incorporates advanced metering system and remote communication ensures continued operation and minimal down time.”

Ministry of Electricity and Water, Kuwait.

Improve electrical networks and reduce energy costs

Power Factor Correction


Every electric machine needs active power (kW) and reactive power (kvar) to operate. The power rating of the installation in kVA is the combination of both:
 $(kVA)^2 = (kW)^2 + (kvar)^2$.

The Power Factor has been defined as the ratio of active power (kW) to apparent power (kVA).

Power Factor = $(kW) / (kVA)$.

The objective of Reactive Energy management is improvement of Power Factor, or "Power Factor Correction".

This is typically achieved by producing reactive energy close to the consuming loads, through connection of capacitor banks to the network.

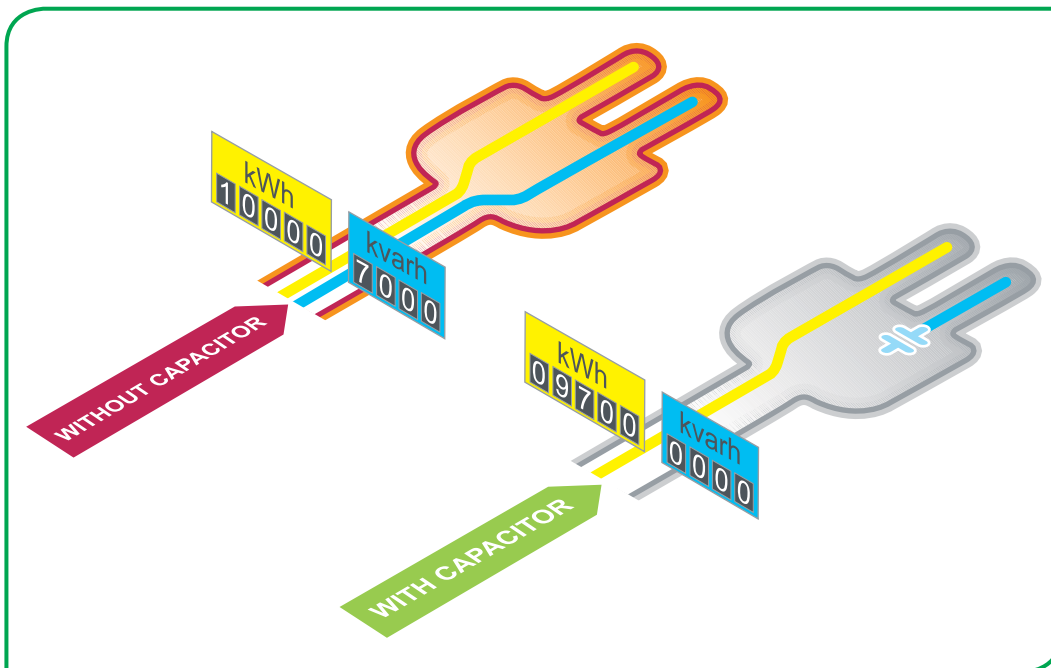

Ensure reliability and safety on installations



Quality and reliability

- Continuity of service thanks to the high performance and long life expectancy of capacitors.
- 100% testing in manufacturing plant.
- Design and engineering with the highest international standards.

Safety

- Tested safety features integrated on each phase.
- Over-pressure system for safe disconnection at the end of life.
- All materials and components are free of PCB pollutants.

Efficiency and productivity

- Product development including innovation in ergonomics and ease of installation and connection.
- Specially designed components to save time on installation and maintenance.
- All components and solutions available through a network of distributors and partners in more than 100 countries.



Thanks to the know-how developed over 50 years, Schneider Electric ranks as the global specialist in Energy management providing a unique and comprehensive portfolio. Schneider Electric helps you to make the most of your energy with innovative, reliable and safe solutions.

Quality & Environment

Quality certified - ISO9001, ISO14001 and ISO50001

A major strength

In each of its units, Schneider Electric has an operating organization whose main role is to verify quality and ensure compliance with standards. This procedure is:

- uniform for all departments;
- recognized by numerous customers and official organizations.

But, above all, its strict application has made it possible to obtain the recognition of independent organizations.

The quality system for design and manufacturing is certified in compliance with the requirements of the ISO 9001 and ISO 14001 Quality Assurance model.

Stringent, systematic controls

During its manufacture, each equipment item undergoes systematic routine tests to verify its quality and compliance:

- measurement of operating capacity and tolerances;
- measurement of losses;
- dielectric testing;
- checks on safety and locking systems;
- checks on low-voltage components;
- verification of compliance with drawings and diagrams.

The results obtained are recorded and initialled by the Quality Control Department on the specific test certificate for each device.

RoHS, REACH Compliance

All LV PFC Components of Schneider Electric are RoHS, REACH Compliant.



Schneider Electric undertakes to reduce the energy bill and CO₂ emissions of its customers by proposing products, solutions and services which fit in with all levels of the energy value chain. The Power Factor Correction and harmonic filtering offer form part of the energy efficiency approach.



A new solution for building your electrical installations

A comprehensive offer

Power Factor Correction and harmonic filtering form part of a comprehensive offer of products perfectly coordinated to meet all medium- and low-voltage power distribution needs.

Use of these products in the electrical installation will result in:

- improved continuity of service;
- reduced power losses;
- guarantee of scalability;
- efficient monitoring and management.

You thus have all the trumps in hand in terms of expertise and creativity for optimized, reliable, expandable and compliant installations.

Tools for easier design and setup

With Schneider Electric, you have a complete range of tools that support you in the knowledge and setup of products, all this in compliance with the standards in force and standard engineering practice.

These tools, technical notebooks and guides, design aid software, training courses, etc. are regularly updated.



Schneider Electric joins forces with your expertise and your creativity for optimized, reliable, expandable and compliant installations.



Because each electrical installation is a specific case, there is no universal solution.

The variety of combinations available allows you to achieve genuine customization of technical solutions.

You can express your creativity and highlight your expertise in the design, development and operation of an electrical installation.

General contents

Power Factor Correction guideline 3

Low Voltage capacitors 15

Detuned reactors 43

Power Factor controllers 49

Contactors 57

Appendix 61

Presentation

Why reactive energy management? 4

Method for determining compensation 6

Low Voltage capacitors with detuned
reactors 10

Rated voltage and current 11

Capacitor selection guide 12

Construction of references Principle 13

Low Voltage capacitors 15

Detuned reactors 43


Power Factor controllers 49

Contactors 57

Appendix 61

Why reactive energy management?

Principle of reactive energy management



All AC electrical networks consume two types of power: active power (kW) and reactive power (kvar):


- **The active power P** (in kW) is the real power transmitted to loads such as motors, lamps, heaters, computers, etc. The electrical active power is transformed into mechanical power, heat or light.
- **The reactive power Q** (in kvar) is used only to power the magnetic circuits of machines, motors and transformers.

The apparent power S (in kVA) is the vector combination of active and reactive power.

The circulation of reactive power in the electrical network has major technical and economic consequences. For the same active power P, a higher reactive power means a higher apparent power, and thus a higher current must be supplied.

The circulation of active power over time results in active energy (in kWh). The circulation of reactive power over time results in reactive energy (kvarh).

In an electrical circuit, the reactive energy is supplied in addition to the active energy.

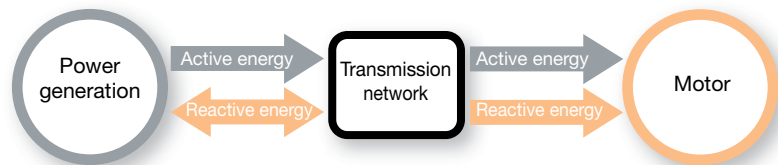


Reactive energy supplied and billed by the energy provider.

For these reasons, there is a great advantage in generating reactive energy at the load level in order to prevent the unnecessary circulation of current in the network. This is what is known as “**power factor correction**”. This is obtained by the connection of capacitors, which produce reactive energy in opposition to the energy absorbed by loads such as motors.

The result is a reduced apparent power, and an improved power factor P/S' as illustrated in the diagram opposite.


The power generation and transmission networks are partially relieved, reducing power losses and making additional transmission capacity available.

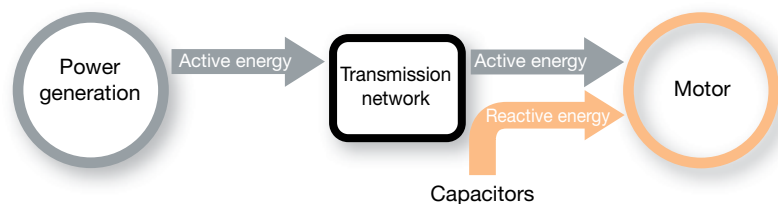

The reactive power is supplied by capacitors. No billing of reactive power by the energy supplier.

+ Due to this higher supplied current, the circulation of reactive energy in distribution networks results in:

- > Overload of transformers
- > Higher temperature rise in power cables
- > Additional losses
- > Large voltage drops
- > Higher energy consumption and cost
- > Less distributed active power.



Why reactive energy management?



Benefits of reactive energy management

Optimized management of reactive energy brings economic and technical advantages.

Savings on the electricity bill

- > Eliminating penalties on reactive energy and decreasing kVA demand.
- > Reducing power losses generated in the transformers and conductors of the installation.

Example:

Loss reduction in a 630 kVA transformer $PW = 6,500 W$ with an initial Power Factor = 0.7.

With power factor correction, we obtain a final Power Factor = 0.98.

The losses become: 3,316 W, i.e. a reduction of 49 %.

Increasing available power

A high power factor optimizes an electrical installation by allowing better use of the components. The power available at the secondary of a MV/LV transformer can therefore be increased by fitting power factor correction equipment on the low voltage side.

The table opposite shows the increased available power at the transformer output through improvement of the Power Factor from 0.7 to 1.

| Power factor | Increased available power |
|--------------|---------------------------|
| 0.7 | 0% |
| 0.8 | +14% |
| 0.85 | +21% |
| 0.90 | +28% |
| 0.95 | +36% |
| 1 | +43% |

Reducing installation size

Installing power factor correction equipment allows conductor cross-section to be reduced, since less current is absorbed by the compensated installation for the same active power.

The opposite table shows the multiplying factor for the conductor cross-section with different power factor values.

| Power factor | Cable cross-section multiplying factor |
|--------------|--|
| 1 | 1 |
| 0.80 | 1.25 |
| 0.60 | 1.67 |
| 0.40 | 2.50 |

Reducing voltage drops in the installation


Installing capacitors allows voltage drops to be reduced upstream of the point where the power factor correction device is connected.

This prevents overloading of the network and reduces harmonics, so that you will not have to overrate your installation.

The selection of Power Factor Correction equipment can follow a 4-step process:

- **Calculation of the required reactive energy.**
- **Selection of the compensation mode:**
 - Central, for the complete installation
 - By sector
 - For individual loads, such as large motors.
- **Selection of the compensation type:**
 - Fixed, by connection of a fixed-value capacitor bank;
 - Automatic, by connection of a different number of steps, allowing adjustment of the reactive energy to the required value;
 - Dynamic, for compensation of highly fluctuating loads.
- **Allowance for operating conditions and harmonics.**

Step 1: Calculation of the required reactive power



The objective is to determine the required reactive power Q_c (kvar) to be installed, in order to improve the power factor $\cos \phi$ and reduce the apparent power S .

For $\phi' < \phi$, we obtain: $\cos \phi' > \cos \phi$ and $\tan \phi' < \tan \phi$.

This is illustrated in the diagram opposite.

Q_c can be determined from the formula $Q_c = P \cdot (\tan \phi - \tan \phi')$, which is deduced from the diagram.

Q_c = power of the capacitor bank in kvar.

P = active power of the load in kW.

$\tan \phi$ = tangent of phase shift angle before compensation.

$\tan \phi'$ = tangent of phase shift angle after compensation.

The parameters ϕ and $\tan \phi$ can be obtained from billing data, or from direct measurement in the installation.

The following table can be used for direct determination.

| Before compensation | | Reactive power (kvar) to be installed per kW of load, in order to get the required $\cos \phi'$ or $\tan \phi'$ | | | | | | | |
|---------------------|-------------|---|------|------|------|-------|------|-------|-------|
| | | $\tan \phi'$ | 0.75 | 0.62 | 0.48 | 0.41 | 0.33 | 0.23 | 0.00 |
| | | $\cos \phi'$ | 0.80 | 0.85 | 0.90 | 0.925 | 0.95 | 0.975 | 1.000 |
| $\tan \phi$ | $\cos \phi$ | | | | | | | | |
| 1.73 | 0.5 | 0.98 | 1.11 | 1.25 | 1.32 | 1.40 | 1.50 | 1.73 | |
| 1.02 | 0.70 | 0.27 | 0.40 | 0.54 | 0.61 | 0.69 | 0.79 | 1.02 | |
| 0.96 | 0.72 | 0.21 | 0.34 | 0.48 | 0.55 | 0.64 | 0.74 | 0.96 | |
| 0.91 | 0.74 | 0.16 | 0.29 | 0.42 | 0.50 | 0.58 | 0.68 | 0.91 | |
| 0.86 | 0.76 | 0.11 | 0.24 | 0.37 | 0.44 | 0.53 | 0.63 | 0.86 | |
| 0.80 | 0.78 | 0.05 | 0.18 | 0.32 | 0.39 | 0.47 | 0.57 | 0.80 | |
| 0.75 | 0.80 | | 0.13 | 0.27 | 0.34 | 0.42 | 0.52 | 0.75 | |
| 0.70 | 0.82 | | 0.08 | 0.21 | 0.29 | 0.37 | 0.47 | 0.70 | |
| 0.65 | 0.84 | | 0.03 | 0.16 | 0.24 | 0.32 | 0.42 | 0.65 | |
| 0.59 | 0.86 | | | 0.11 | 0.18 | 0.26 | 0.37 | 0.59 | |
| 0.54 | 0.88 | | | 0.06 | 0.13 | 0.21 | 0.31 | 0.54 | |
| 0.48 | 0.90 | | | | 0.07 | 0.16 | 0.26 | 0.48 | |

Example: consider a 1000 kW motor with $\cos \phi = 0.8$ ($\tan \phi = 0.75$).

In order to obtain $\cos \phi = 0.95$, it is necessary to install a capacitor bank with a reactive power equal to $k \times P$, i.e.: $Q_c = 0.42 \times 1000 = 420$ kvar.

Method for determining compensation

Step 2: Selection of the compensation mode

The location of low-voltage capacitors in an installation constitutes the mode of compensation, which may be central (one location for the entire installation), by sector (section-by-section), at load level, or some combination of the latter two. In principle, the ideal compensation is applied at a point of consumption and at the level required at any moment in time.

In practice, technical and economic factors govern the choice.

The location for connection of capacitor banks in the electrical network is determined by:

- the overall objective (avoid penalties on reactive energy, relieve transformer or cables, avoid voltage drops and sags)
- the operating mode (stable or fluctuating loads)
- the foreseeable influence of capacitors on the network characteristics
- the installation cost.

Central compensation


The capacitor bank is connected at the head of the installation to be compensated in order to provide reactive energy for the whole installation. This configuration is convenient for a stable and continuous load factor.

Group compensation (by sector)

The capacitor bank is connected at the head of the feeders supplying one particular sector to be compensated. This configuration is convenient for a large installation, with workshops having different load factors.

Compensation of individual loads

The capacitor bank is connected right at the inductive load terminals (especially large motors). This configuration is very appropriate when the load power is significant compared to the subscribed power. This is the ideal technical configuration, as the reactive energy is produced exactly where it is needed, and adjusted to the demand.

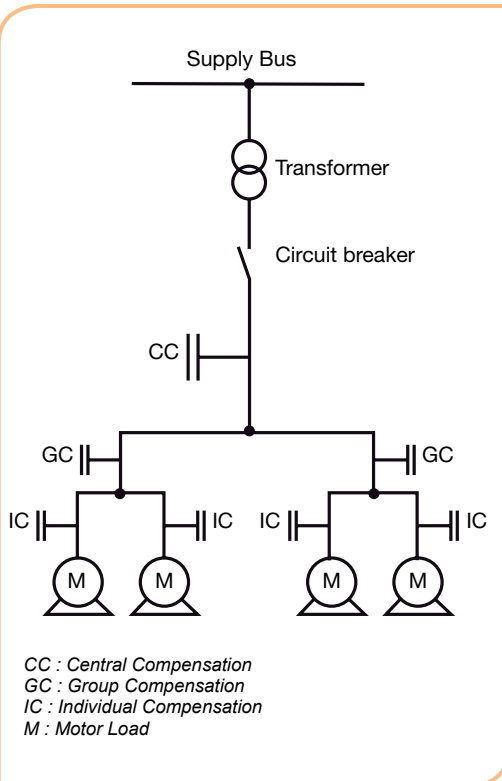

Step 3: Selection of the compensation type

Different types of compensation should be adopted depending on the performance requirements and complexity of control:

- Fixed, by connection of a fixed-value capacitor bank
- Automatic, by connection of a different number of steps, allowing adjustment of the reactive energy to the required value
- Dynamic, for compensation of highly fluctuating loads.

Fixed compensation

This arrangement uses one or more capacitor(s) to provide a constant level of compensation. Control may be:

- Manual: by circuit-breaker or load-break switch
- Semi-automatic: by contactor
- Direct connection to an appliance and switched with it.

These capacitors are installed:

- At the terminals of inductive loads (mainly motors)
- At busbars supplying numerous small motors and inductive appliances for which individual compensation would be too costly
- In cases where the load factor is reasonably constant.

Automatic compensation

This kind of compensation provides automatic control and adapts the quantity of reactive power to the variations of the installation in order to maintain the targeted $\cos \varphi$. The equipment is installed at points in an installation where the active-power and/or reactive-power variations are relatively large, for example:

- on the busbars of a main distribution switchboard
- on the terminals of a heavily-loaded feeder cable.

Where the kvar rating of the capacitors is less than or equal to 15 % of the power supply transformer rating, a fixed value of compensation is appropriate. Above the 15 % level, it is advisable to install an automatically-controlled capacitor bank.

Control is usually provided by an electronic device (Power Factor Controller) which monitors the actual power factor and orders the connection or disconnection of capacitors in order to obtain the targeted power factor. The reactive energy is thus controlled by steps. In addition, the Power Factor Controller provides information on the network characteristics (voltage amplitude and distortion, power factor, actual active and reactive power ...) and equipment status. Alarm signals are transmitted in case of malfunction.

Connection is usually provided by contactors. For compensation of highly fluctuating loads use of active filters or Electronic Var Compensators(EVC) are recommended. Contact Schneider Electric for electronic compensation solutions.

Dynamic compensation

This kind of compensation is required when fluctuating loads are present, and voltage fluctuations have to be prevented. The principle of dynamic compensation is to associate a fixed capacitor bank and an electronic var compensator, providing either leading or lagging reactive currents.

The result is continuously varying fast compensation, perfectly suitable for loads such as lifts, crushers, spot welding, etc.

Method for determining compensation



To know more about the influence of harmonics in electrical installations, see appendix page 61

Step 4: Allowing for operating conditions and harmonics

Capacitors should be selected depending on the working conditions expected during their lifetime.

Allowing for operating conditions

The operating conditions have a great influence on the life expectancy of capacitors. The following parameters should be taken into account:

- Ambient Temperature (°C)
- Expected over-current, related to voltage disturbances, including maximum sustained overvoltage
- Maximum number of switching operations/year
- Required life expectancy.

Allowing for harmonics


Depending on the magnitude of harmonics in the network, different configurations should be adopted.

- **Standard** capacitors: when no significant non-linear loads are present.
- **Harmonic** rated capacitors used with detuned reactors. Applicable when a significant number of non-linear loads are present. Reactors are necessary in order to prevent the amplification of harmonic currents and avoid resonance.
- **Active filters**: when non-linear loads are predominant, use of active filters are recommended for harmonic mitigation. Solutions can be recommended based on computer simulations or on site measurement of the network.

Capacitor selection

Different ranges with different levels of ruggedness are proposed:

- **"EasyCan"**: Capacitors for standard operating conditions, and when no significant non-linear loads are present.
- **"VarPlus Can & Box"**: Capacitors for stringent operating conditions, particularly voltage disturbances, or when a few non-linear loads are present. The rated current of capacitors must be increased in order to cope with the circulation of harmonic currents.
- **Capacitors with detuned reactors**: applicable when a significant number of non-linear loads are present.

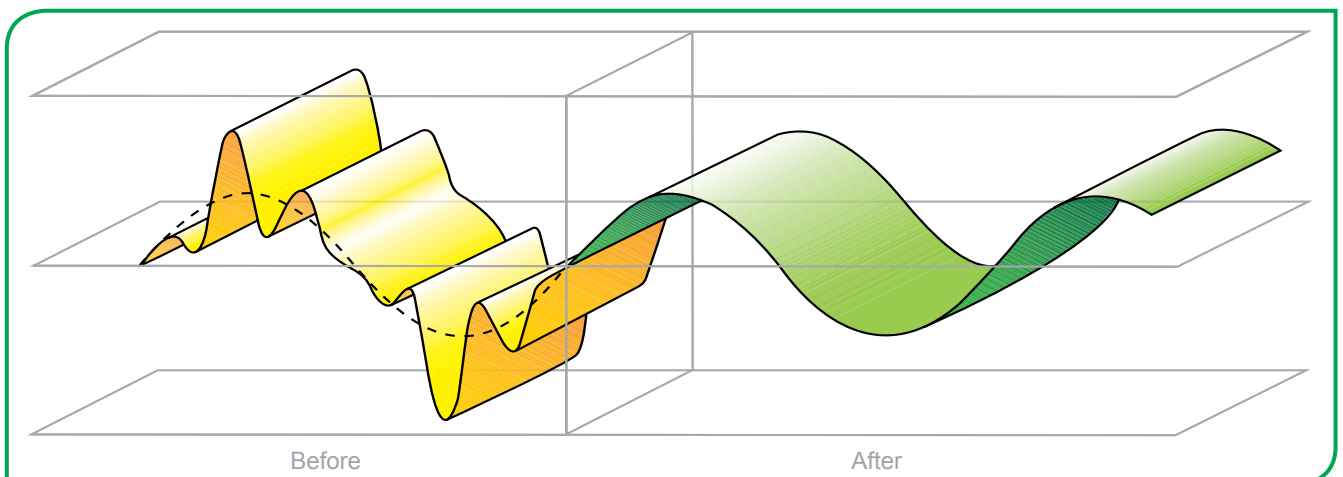



Capacitors and reactors are configured in a series resonant circuit, tuned so that the series resonant frequency is below the lowest harmonic frequency present in the system

Reactors should be associated with capacitor banks for Power Factor Correction in systems with significant non-linear loads, generating harmonics. Capacitors and reactors are configured in a series resonant circuit, tuned so that the series resonant frequency is below the lowest harmonic frequency present in the system.

For this reason, this configuration is usually called “Detuned Capacitor Bank”, and the reactors are referred to as “Detuned Reactors”.

The use of detuned reactors thus prevents harmonic resonance problems, avoids the risk of overloading the capacitors and helps reduce voltage harmonic distortion in the network.

The tuning frequency can be expressed by the relative impedance of the reactor (in %), or by the tuning order, or directly in Hz.

The most common values of relative impedance are 5.7, 7 and 14 % (14 % is used with high level of 3rd harmonic voltages).

| Relative impedance (%) | Tuning order | Tuning frequency @50Hz (Hz) | Tuning frequency @60Hz (Hz) |
|------------------------|--------------|-----------------------------|-----------------------------|
| 5.7 | 4.2 | 210 | 250 |
| 7 | 3.8 | 190 | 230 |
| 14 | 2.7 | 135 | 160 |

The selection of the tuning frequency of the reactor capacitor depends on several factors:

- Presence of zero-sequence harmonics (3, 9, ...)
- Need for reduction of the harmonic distortion level
- Optimization of the capacitor and reactor components
- Frequency of ripple control system if any.
- To prevent disturbances of the remote control installation, the tuning frequency should be selected at a lower value than the ripple control frequency.
- In a detuned filter application, the voltage across the capacitors is higher than the system’s rated voltage. In that case, capacitors should be designed to withstand higher voltages.
- Depending on the selected tuning frequency, part of the harmonic currents is absorbed by the detuned capacitor bank. In that case, capacitors should be designed to withstand higher currents, combining fundamental and harmonic currents.

Effective reactive energy

In the pages relating to detuned capacitor banks, the reactive energy (kvar) given in the tables is the resulting reactive energy provided by the combination of capacitors and reactors.

Capacitor rated voltage

Capacitors have been specially designed to operate in detuned bank configurations. Parameters such as the rated voltage, over-voltage and over-current capabilities have been improved, compared to standard configuration.

Rated voltage and current

According to **IEC 60681-1** standard, the **rated voltage (U_N)** of a capacitor is defined as the continuously admissible operating voltage.

The **rated current (I_N)** of a capacitor is the current flowing through the capacitor when the rated voltage (U_N) is applied at its terminals, supposing a purely sinusoidal voltage and the exact value of reactive power (kvar) generated.

Capacitor units shall be suitable for continuous operation at an r.m.s. current of $(1.3 \times I_N)$.

In order to accept system voltage fluctuations, capacitors are designed to sustain over-voltages of limited duration. For compliance to the standard, capacitors are for example requested to sustain over-voltages equal to 1.1 times U_N , 8 h per 24 h.

VarPlus Can, VarPlus Box, VarPlus Box Energy and EasyCan capacitors have been designed and tested extensively to operate safely on industrial networks. The design margin allows operation on networks including voltage fluctuations and common disturbances. Capacitors can be selected with their rated voltage corresponding to the network voltage. For different levels of expected disturbances, different technologies are proposed, with larger design margin for capacitors adapted to the most stringent working conditions (VarPlus Can, VarPlus Box & VarPlus Box Energy).

VarPlus Can, VarPlus Box, VarPlus Box Energy and EasyCan capacitors when used along with Detuned Reactors have to be selected with a rated voltage higher than network service voltage (U_s). In detuned filter applications, the voltage across the capacitor is higher than the network service voltage (U_s).

The recommended rated voltage of capacitors to be used in detuned filter applications with respect to different network service voltage (U_s) and relative impedance is given in the table below.

These values ensure a safe operation in the most stringent operating conditions.

Less conservative values may be adopted, but a case by case analysis is necessary.

| Capacitor Rated Voltage U_N (V) | | Network Service Voltage U_s (V) | | | | |
|-----------------------------------|-----|-----------------------------------|-----|-------|-----|-----|
| | | 50 Hz | | 60 Hz | | |
| Relative Impedance (%) | 5.7 | 400 | 690 | 400 | 480 | 600 |
| | 7 | 480 | 830 | 480 | 575 | 690 |
| | 14 | 480 | | 480 | | |

Capacitors must be selected depending on the working conditions expected during their lifetime.

| Solution | Description | Recommended use for | Max. condition |
|-------------------|--|--|--------------------|
| EasyCan | Standard capacitor <i>Available in can construction</i> | > Networks with non significant non-linear loads | $N_{LL} \leq 10\%$ |
| | | > Standard over-current | $1.5 I_N$ |
| | | > Standard operating temperature | 55 °C (class D) |
| | | > Normal switching frequency | 5,000/year |
| | | > Standard life expectancy | Up to 100,000h* |
| | | | |
| VarPlus Can & Box | Heavy-duty capacitor <i>Available in can and box construction</i> | > A few non-linear loads | $N_{LL} \leq 20\%$ |
| | | > Significant over-current | $1.8 I_N$ |
| | | > Standard operating temperature | 55 °C (class D) |
| | | > Significant switching frequency | 7,000/year |
| | | > Long life expectancy | Up to 130,000h* |
| | | | |

* The maximum life expectancy is given considering standard operating conditions: rated voltage (U_N), rated current (I_N), 35 °C ambient temperature.
WARNING: the life expectancy will be reduced if capacitors are used in maximum working conditions.

Since the harmonics are caused by non-linear loads, an indicator for the magnitude of harmonics is the ratio of the total power of non-linear loads to the power supply transformer rating.

This ratio is denoted N_{LL} , and is also known as G_n/S_n :

$N_{LL} = \text{Total power of non-linear loads } (G_n) / \text{Installed transformer rating } (S_n)$.

Example:

- Power supply transformer rating: $S_n = 630 \text{ kVA}$
- Total power of non-linear loads: $G_n = 150 \text{ kVA}$
- $N_{LL} = (150/630) \times 100 = 24\%$

It is recommended to use Detuned Reactors with Harmonic Rated Capacitors (higher rated voltage than the network service voltage - see the Harmonic Application Tables) for $N_{LL} > 20\%$ and up to 50 %.

Note: there is a high risk in selecting the capacitors based only on N_{LL} as the harmonics in grid may cause current amplification and capacitors along with other devices may fail. Refer to page 61 for further details.

Construction of references

Principle

Capacitors

| B | L | R | C | H | 1 | 0 | 4 | A | 1 | 2 | 5 | B | 4 | 0 |
|---|---|---|---|---|---|---|---|---|---|---|---|--|---|---|
| | | | Construction C = CAN B = BOX | Range S = EasyCan H = VarPlus E = VarPlus Energy SM=EasyCan Single Phase HM= VarPlus Can Single Phase | Power at 50 Hz 10.4 kvar at 50 Hz A = 50 Hz | | | | Power at 60 Hz 12.5 kvar at 60 Hz B = 60 Hz "000B" means: labelled only for 50 Hz | | | Voltage 24 - 240 V 40 - 400 V 44 - 440 V 48 - 480 V 52 - 525 V 57 - 575 V 60 - 600 V 69 - 690 V 83 - 830 V | | |

Example:

BLRCS200A240B44 = EasyCan, 440 V, 20 kvar at 50 Hz and 24 kvar at 60 Hz

Detuned reactors

| L | V | R | 0 | 5 | 1 | 2 | 5 | A | 6 | 9 | T |
|---|---|-----------------|--|---|---------------------------|---|---|--|--|---|---|
| | | Detuned Reactor | Relative impedance 05 = 5.7 % 07 = 7 % 14 = 14 % | | Power 12.5 kvar | | | Freq. A = 50 Hz B = 60 Hz | Voltage 40 - 400 V 48 - 480 V 60 - 600 V 69 - 690 V | | |

Example:

LVR05125A69T = Detuned Reactor, 690 V, 5.7 %, 12.5 kvar, 50 Hz.

Contents

| | |
|--|----|
| <i>Presentation</i> | 3 |
| <i>Power Factor Correction guideline</i> | 15 |
| <i>Low Voltage capacitors</i> | 15 |
| Offer Overview | 16 |
| EasyCan | 18 |
| VarPlus Can | 26 |
| Can type capacitor mechanical characteristics | 34 |
| VarPlus Box | 36 |
| Box Type Capacitor mechanical characteristics | 41 |
| <i>Detuned reactors</i> | 43 |
| <i>Power Factor controllers</i> | 49 |
| <i>Contactors</i> | 57 |
| <i>Appendix</i> | 61 |

EasyCan

Group of EEC Caps & EEC SF copy.jpg



EasyCan Three Phase Capacitor

EasyCan Single Phase Capacitor

| | EasyCan |
|-----------------------------|--|
| Construction | Extruded aluminium can |
| Voltage range | 230 V - 525 V |
| Power range | 1 - 30.3 kvar |
| Peak inrush current | Up to $200 \times I_N$ |
| Overvoltage | $1.1 \times U_N$ 8 h every 24 h |
| Overcurrent | $1.5 \times I_N$ |
| Mean life expectancy | Up to 100,000 h |
| Safety | Self-healing + 3Phase pressure sensitive disconnecter (PSD) in 3Phase capacitor and 2Phase pressure sensitive disconnecter (PSD) in 1Phase capacitor + non accessible inbuilt discharge device (50 V/1 min) |
| Dielectric | Metallized Polypropylene film with Zn/Al alloy |
| Impregnation | Non-PCB, Biodegradable soft resin |
| Ambient temperature | min. -25 °C max 55 °C |
| Protection | IP20 (for fast-on and clamptype), indoor IP00 (for stud type), indoor |
| Mounting | Upright |
| Terminals | <ul style="list-style-type: none"> ■ Double fast-on + cable ■ CLAMPTITE - terminals with electric shock protection (finger-proof) ■ Stud type terminal (2 terminals for single phase) |

VarPlus Can

Group of 3 Caps copy.jpg



VarPlus Can Three Phase Capacitor

| | VarPlus Can |
|-----------------------------|---|
| Construction | Extruded aluminium can |
| Voltage range | 230 V - 830 V |
| Power range | 1 - 57.1 kvar |
| Peak inrush current | Up to $250 \times I_N$ |
| Overvoltage | $1.1 \times U_N$ 8 h every 24 h |
| Overcurrent | $1.8 \times I_N$ |
| Mean life expectancy | Up to 130,000 h |
| Safety | Self-healing + 3Phase pressure sensitive disconnecter (PSD) in 3Phase capacitor and 2Phase pressure sensitive disconnecter (PSD) in 1Phase capacitor + non accessible inbuilt discharge device (50 V/1 min) |
| Dielectric | Metallized Polypropylene film with Zn/Al alloy with special profile metallization and wave cut |
| Impregnation | Non-PCB, Bio-degradable sticky resin (PU) |
| Ambient temperature | min. -25 °C max 55 °C |
| Protection | IP20 (for fast-on and clamptype), indoor IP00 (for Stud type), indoor |
| Mounting | Upright, horizontal |
| Terminals | <ul style="list-style-type: none"> ■ Double fast-on + cable ■ CLAMPTITE - Three-phase terminal with electric shock protection (finger-proof) ■ Stud type terminal (> 30 kvar) |

Offer Overview

VarPlus Box



| | VarPlus Box |
|----------------------------------|--|
| Construction | Steel sheet enclosure |
| Voltage range | 380 V - 830 V |
| Power range (three-phase) | 5 - 60 kvar |
| Peak inrush current | Up to $250 \times I_N$ |
| Overvoltage | $1.1 \times U_N$ 8 h every 24 h |
| Overcurrent | $1.8 \times I_N$ |
| Mean life expectancy | Up to 130,000 h |
| Safety | Self-healing + 3 phase pressure-sensitive disconnecter (PSD) independent of mechanical assembly + inbuilt discharge device (50 V/1 min) + double enclosure protection (Aluminum can inside steel box) |
| Dielectric | Metallized Polypropylene film with Zn/Al alloy with special profile metallization and wave cut |
| Impregnation | Non-PCB, sticky (dry) Biodegradable resin |
| Ambient temperature | min. $-25\text{ }^{\circ}\text{C}$ max $55\text{ }^{\circ}\text{C}$ |
| Protection | IP20, Indoor |
| Mounting | Upright |
| Terminals | Bushing terminals designed for large cable termination |

An easy choice for savings which is optimized to deliver the performance you need. Suitable for standard operating conditions to deliver safe and reliable performance.

GroupECCapacitors



EasyCan three phase

Operating conditions

- For networks with insignificant non-linear loads: ($N_{LL} \leq 10\%$).
- Standard voltage disturbances.
- Standard operating temperature up to 55 °C.
- Normal switching frequency up to 5000 /year.
- Maximum current (including harmonics) is $1.5 \times I_N$.

Easy installation & maintenance

- Optimized design for low weight, compactness and reliability to ensure easy installation and upto 20% space savings in cubicles.
- New CLAMPTITE terminals that allows maintained tightness.
- Non accessible in-built discharge resistors to ensure safety.
- 1 point for mounting and earthing.
- Simultaneous and safe disconnection of all the phases at end of life in EasyCan.
- Stacked design and resin filled technology for better cooling.

Safety

- Self-healing.
- Pressure-sensitive disconnecter on all three phases.
- Discharge resistors fitted - non removable.
- Finger-proof CLAMPTITE terminals to reduce risk of accidental contact and to ensure firm termination (10 to 30.3 kvar in three phase and 8.3 - 15.1 kvar in single phase).

Technology

Constructed internally with single-phase capacitor elements assembled in an optimized design. Each capacitor element is manufactured with metallized polypropylene film.

The active capacitor elements are encapsulated in a specially formulated biodegradable, non-PCB, polyurethane soft resin which ensures thermal stability and heat removal from inside the capacitor.

The unique finger-proof CLAMPTITE termination is fully integrated with discharge resistors and allows suitable access to tightening and allows cable termination without any loose connections.

For lower ratings, double fast-on terminals with wires are provided.

Benefits

- Easy installation
- Easy for reliability and safe usage.
- Easy for quality assurance.
- Easy choice for building your solutions with other Schneider Electric components.
- Easy choice for savings.

GroupECCapacitors



EasyCan single phase

EasyCan

Single Phase & Three Phase

EasyCan300type4



EasyCan600_SF_000type4



Technical specifications

General characteristics

| | | |
|-----------------------|--|--------------------------------------|
| Standards | IEC 60831-1/2 | |
| Voltage range | 230V to 525V in Three Phase & 220-440V in Single Phase | |
| Frequency | 50 / 60 Hz | |
| Power range | 1 to 30.3 kvar | |
| Losses (dielectric) | < 0.2W/kvar | |
| Losses (total) | < 0.5W/kvar | |
| Capacitance tolerance | -5 %, +10 % | |
| Voltage test | Between terminals | 2.15 x U _N (AC), 10 s |
| | Between terminal & container | 3 kV (AC), 10 s or 3.66 kV (AC), 2 s |
| | Impulse voltage | 8 kV |
| Discharge resistor | Fitted, standard discharge time 60 s | |

Working conditions

| | |
|-----------------------------|---|
| Ambient temperature | -25 / 55 °C (Class D) |
| Humidity | 95 % |
| Altitude | 2,000 m above sea level |
| Overvoltage | 1.1 x U _N 8 h in every 24 h |
| Overcurrent | Up to 1.5 x I _N |
| Peak inrush current | 200 x I _N |
| Switching operations (max.) | Up to 5,000 switching operations per year |
| Mean Life expectancy | Up to 100,000 hrs |
| Harmonic content withstand | N _{LL} ≤ 10 % |

Installation characteristics

| | |
|-------------------|--|
| Mounting position | Indoor, upright |
| Fastening | Threaded M12 stud at the bottom |
| Earthing | |
| Terminals | <ul style="list-style-type: none"> ■ CLAMPTITE - terminals with electric shock protection (finger-proof) & double fast-on terminal in lower kvar ■ Stud type terminal: <ul style="list-style-type: none"> □ Three way stud type terminals for the ratings above 30.3 kvar in three phase capacitors (2 terminals for single phase) □ Two way stud terminals for ratings above 15.1 kvar in single phase |

Safety features

| | |
|------------|---|
| Safety | Self-healing + Pressure-sensitive disconnecter + Discharge device |
| Protection | IP20 (for fast-on and clamptype) |

Construction

| | |
|--------------|--|
| Casing | Extruded Aluminium Can |
| Dielectric | Metallized polypropylene film with Zn/Al alloy |
| Impregnation | Biodegradable, Non-PCB, poly urethane soft resin |

⚠ WARNING

HAZARD OF ELECTRICAL SHOCK

Wait 5 minutes after isolating supply before handling



Failure to follow these instructions can result in injury or equipment damage

| Rated Voltage 240 to 440 V | | | | | | | µF (X1) | Case Code | Reference Number |
|----------------------------|-------------|-------------|-------|-------|-------------|-------|--------------|--------------|------------------|
| 50 Hz | | | | | | | | | |
| Q _N (kvar) | | | | | | | | | |
| 230 V | 240 V | 250 V | 280 V | 300 V | 400 V | 440 V | | | |
| 0.25 | 0.27 | 0.29 | 0.37 | 0.42 | 0.75 | - | 15.9 | ECM | BLRCSM008A010B40 |
| 0.50 | 0.54 | 0.59 | 0.74 | 0.8 | 1.5 | - | 29.9 | GCM | BLRCSM015A018B40 |
| 0.83 | 0.90 | 1.0 | 1.2 | 1.4 | 2.5 | - | 49.8 | GCM | BLRCSM025A030B40 |
| 1.0 | 1.1 | 1.2 | 1.5 | 1.7 | 3.0 | - | 59.7 | GCM | BLRCSM030A036B40 |
| 1.1 | 1.2 | 1.4 | 1.7 | 2.0 | 3.5 | 4.2 | 69.1 | GCM | BLRCSM042A050B44 |
| 1.4 | 1.5 | 1.6 | 2.0 | 2.3 | 4.2 | - | 83.6 | KCM | BLRCSM042A050B40 |
| 1.5 | 1.6 | 1.8 | 2.2 | 2.5 | 4.5 | - | 89.6 | KCM | BLRCSM045A054B40 |
| 2.5 | 2.7 | 3.0 | 3.7 | 4.3 | 7.6 | - | 151.3 | LCM | BLRCSM076A091B40 |
| 2.8 | 3.0 | 3.3 | 4.1 | 4.7 | 8.3 | - | 165.2 | RCM | BLRCSM083A100B40 |
| 5.0 | 5.4 | 5.9 | 7.4 | 8.5 | 15.1 | - | 300.6 | RCM | BLRCSM151A181B40 |
| 7.1 | 7.7 | 8.4 | 10.5 | 12.1 | 21.5 | - | 427.9 | TCM | BLRCSM215A258B40 |
| 7.4 | 8.1 | 8.8 | 11.0 | 12.7 | 22.5 | - | 447.9 | TCM | BLRCSM225A270B40 |
| 7.7 | 8.4 | 9.1 | 11.4 | 13.1 | 23.3 | - | 463.8 | TCM | BLRCSM233A280B40 |
| 8.5 | 9.3 | 10.1 | 12.6 | 14.5 | 25.8 | - | 513.5 | VCM | BLRCSM258A310B40 |
| 9.2 | 10.1 | 10.9 | 13.7 | 15.7 | 28.0 | - | 557.3 | VCM | BLRCSM280A336B40 |
| 10.0 | 10.9 | 11.8 | 14.8 | 17.0 | 30.2 | - | 601.1 | VCM | BLRCSM302A362B40 |
| 10.6 | 11.6 | 12.6 | 15.8 | 18.1 | - | - | 640.5 | TCM | BLRCSM181A217B30 |
| 11.5 | 12.6 | 13.6 | 17.1 | 19.6 | - | - | 693.6 | TCM | BLRCSM196A235B30 |

| Rated Voltage 240 to 440 V | | | | | | | µF (X1) | Case Code | Reference Number |
|----------------------------|-------------|-------------|-------|-------|-------------|-------|--------------|--------------|------------------|
| 60 Hz | | | | | | | | | |
| Q _N (kvar) | | | | | | | | | |
| 230 V | 240 V | 250 V | 280 V | 300 V | 400 V | 440 V | | | |
| 230V | 240V | 250V | 280V | 300V | 400V | 440V | | | |
| 0.30 | 0.32 | 0.35 | 0.44 | 0.51 | 0.90 | - | 15.9 | ECM | BLRCSM008A010B40 |
| 0.60 | 0.65 | 0.70 | 0.88 | 1.0 | 1.8 | - | 29.9 | GCM | BLRCSM015A018B40 |
| 1.0 | 1.1 | 1.2 | 1.5 | 1.7 | 3.0 | - | 49.8 | GCM | BLRCSM025A030B40 |
| 1.2 | 1.3 | 1.4 | 1.8 | 2.0 | 3.6 | - | 59.7 | GCM | BLRCSM030A036B40 |
| 1.4 | 1.5 | 1.6 | 2.0 | 2.3 | 4.2 | 5.0 | 69.1 | GCM | BLRCSM042A050B44 |
| 1.7 | 1.8 | 2.0 | 2.5 | 2.8 | 5.0 | - | 83.6 | KCM | BLRCSM042A050B40 |
| 1.8 | 1.9 | 2.1 | 2.6 | 3.0 | 5.4 | - | 89.6 | KCM | BLRCSM045A054B40 |
| 3.0 | 3.3 | 3.6 | 4.5 | 5.1 | 9.1 | - | 151.3 | LCM | BLRCSM076A091B40 |
| 3.3 | 3.6 | 3.9 | 4.9 | 5.6 | 10.0 | - | 165.2 | RCM | BLRCSM083A100B40 |
| 6.0 | 6.5 | 7.1 | 8.9 | 10.2 | 18.1 | - | 300.6 | RCM | BLRCSM151A181B40 |
| 8.5 | 9.3 | 10.1 | 12.6 | 14.5 | 25.8 | - | 427.9 | TCM | BLRCSM215A258B40 |
| 8.9 | 9.7 | 10.5 | 13.2 | 15.2 | 27.0 | - | 447.9 | TCM | BLRCSM225A270B40 |
| 9.2 | 10.1 | 10.9 | 13.7 | 15.7 | 27.9 | - | 463.8 | TCM | BLRCSM233A280B40 |
| 10.2 | 11.1 | 12.1 | 15.2 | 17.4 | 30.9 | - | 513.5 | VCM | BLRCSM258A310B40 |
| 11.1 | 12.1 | 13.1 | 16.4 | 18.9 | 33.6 | - | 557.3 | VCM | BLRCSM280A336B40 |
| 12.0 | 13.0 | 14.2 | 17.8 | 20.4 | 36.2 | - | 601.1 | VCM | BLRCSM302A362B40 |
| 12.8 | 13.9 | 15.1 | 18.9 | 21.7 | - | - | 640.5 | TCM | BLRCSM181A217B30 |
| 13.8 | 15.1 | 16.4 | 20.5 | 23.6 | - | - | 693.6 | TCM | BLRCSM196A235B30 |

EasyCan

Three Phase

Rated Voltage 240/260 V

| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
|-----------------------|-------|-------|-----------------------------|-----------------------|-------|-------|-----------------------------|---------|-----------|------------------|
| Q _N (kvar) | | | I _N (A) at 260 V | Q _N (kvar) | | | I _N (A) at 260 V | | | |
| 230 V | 240 V | 260 V | | 230 V | 240 V | 260 V | | | | |
| 2.5 | 2.7 | 3.2 | 7.1 | 3.0 | 3.3 | 3.8 | 8.5 | 46.0 | HC | BLRCS027A033B24 |
| 5.0 | 5.4 | 6.4 | 14.2 | 6.0 | 6.5 | 7.7 | 17.0 | 92.1 | MC | BLRCS054A065B24 |
| 5.8 | 6.3 | 7.4 | 16.4 | 6.9 | 7.5 | 8.9 | 19.7 | 116.0 | NC | BLRCS063A075B24 |
| 7.6 | 8.3 | 9.6 | 21.3 | 9.1 | 10.0 | 11.5 | 25.5 | 138.1 | NC | BLRCS083A100B24 |
| 10.0 | 10.9 | 12.8 | 28.4 | 12.0 | 13.0 | 15.3 | 34.1 | 152.8 | SC | BLRCS109A130B24 |

Rated Voltage 380/400/415 V

| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
|-----------------------|-------|-------|-----------------------------|-----------------------|-------|-------|-----------------------------|---------|-----------|------------------|
| Q _N (kvar) | | | I _N (A) at 400 V | Q _N (kvar) | | | I _N (A) at 400 V | | | |
| 380 V | 400 V | 415 V | | 380 V | 400 V | 415 V | | | | |
| 0.9 | 1.0 | 1.1 | 1.4 | 1.1 | 1.2 | 1.3 | 1.7 | 6.6 | EC | BLRCS010A012B40 |
| 1.5 | 1.7 | 1.8 | 2.5 | 1.8 | 2.0 | 2.2 | 2.9 | 11.3 | DC | BLRCS017A020B40 |
| 1.8 | 2.0 | 2.2 | 2.9 | 2.2 | 2.4 | 2.6 | 3.5 | 13.3 | DC | BLRCS020A024B40 |
| 2.3 | 2.5 | 2.7 | 3.6 | 2.7 | 3.0 | 3.2 | 4.3 | 16.6 | DC | BLRCS025A030B40 |
| 2.7 | 3.0 | 3.2 | 4.3 | 3.2 | 3.6 | 3.9 | 5.2 | 19.9 | DC | BLRCS030A036B40 |
| 3.8 | 4.2 | 4.5 | 6.1 | 4.5 | 5.0 | 5.4 | 7.3 | 27.8 | HC | BLRCS042A050B40 |
| 4.5 | 5.0 | 5.4 | 7.2 | 5.4 | 6.0 | 6.5 | 8.7 | 33.1 | HC | BLRCS050A060B40 |
| 5.7 | 6.3 | 6.8 | 9.1 | 6.8 | 7.5 | 8.1 | 10.9 | 41.8 | HC | BLRCS063A075B40 |
| 6.8 | 7.5 | 8.1 | 10.8 | 8.1 | 9.0 | 9.7 | 13.0 | 49.7 | HC | BLRCS075A090B40 |
| 7.5 | 8.3 | 8.9 | 12.0 | 9.0 | 10.0 | 10.7 | 14.4 | 55.0 | LC | BLRCS083A100B40 |
| 9.4 | 10.4 | 11.2 | 15.0 | 11.3 | 12.5 | 13.4 | 18.0 | 68.9 | MC | BLRCS104A125B40 |
| 11.3 | 12.5 | 13.5 | 18.0 | 13.5 | 15.0 | 16.1 | 21.7 | 82.9 | NC | BLRCS125A150B40 |
| 12.5 | 13.9 | 15.0 | 20.1 | 15.1 | 16.7 | 18.0 | 24.1 | 92.1 | NC | BLRCS139A167B40 |
| 13.5 | 15.0 | 16.1 | 21.7 | 16.2 | 18.0 | 19.4 | 26.0 | 99.4 | NC | BLRCS150A180B40 |
| 15.1 | 16.7 | 18.0 | 24.1 | 18.1 | 20.0 | 21.6 | 28.9 | 110.7 | SC | BLRCS167A200B40 |
| 18.1 | 20.0 | 21.5 | 28.9 | 21.7 | 24.0 | 25.8 | 34.6 | 132.6 | SC | BLRCS200A240B40 |
| 18.8 | 20.8 | 22.4 | 30.0 | 22.5 | 25.0 | 26.9 | 36.0 | 137.9 | SC | BLRCS208A250B40 |
| 20.0 | 22.2 | 23.9 | 32.0 | 24.0 | 26.6 | 28.7 | 38.4 | 147.0 | SC | BLRCS222A266B40 |
| 22.6 | 25.0 | 26.9 | 36.1 | 27.1 | 30.0 | 32.3 | 43.3 | 165.7 | SC | BLRCS250A300B40 |
| 25.0 | 27.7 | 29.8 | 40.0 | 30.0 | 33.2 | 35.8 | 48.0 | 184.0 | VC | BLRCS277A332B40 |

| Rated Voltage 440 V | | | | | | | | | | |
|-----------------------|-------|-------|-----------------------------|-----------------------|-------|-------|-----------------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) at 440 V | Q _N (kvar) | | | I _N (A) at 440 V | | | |
| 400 V | 415 V | 440 V | | 400 V | 415 V | 440 V | | | | |
| 2.5 | 2.7 | 3.0 | 3.9 | 3.0 | 3.2 | 3.6 | 4.7 | 16.4 | DC | BLRCS030A036B44 |
| 4.1 | 4.4 | 5.0 | 6.6 | 5.0 | 5.3 | 6.0 | 7.9 | 27.4 | HC | BLRCS050A060B44 |
| 6.2 | 6.7 | 7.5 | 9.8 | 7.4 | 8.0 | 9.0 | 11.8 | 41.1 | HC | BLRCS075A090B44 |
| 8.3 | 8.9 | 10.0 | 13.1 | 9.9 | 10.7 | 12.0 | 15.7 | 54.8 | LC | BLRCS100A120B44 |
| 10.3 | 11.1 | 12.5 | 16.4 | 12.4 | 13.3 | 15.0 | 19.7 | 68.5 | NC | BLRCS125A150B44 |
| 11.8 | 12.7 | 14.3 | 18.8 | 14.2 | 15.3 | 17.2 | 22.5 | 78.3 | NC | BLRCS143A172B44 |
| 12.4 | 13.3 | 15.0 | 19.7 | 14.9 | 16.0 | 18.0 | 23.6 | 82.2 | NC | BLRCS150A180B44 |
| 14.0 | 15.0 | 16.9 | 22.2 | 16.8 | 18.0 | 20.3 | 26.6 | 92.6 | SC | BLRCS169A203B44 |
| 15.0 | 16.2 | 18.2 | 23.9 | 18.0 | 19.4 | 21.8 | 28.7 | 99.7 | SC | BLRCS182A218B44 |
| 16.5 | 17.8 | 20.0 | 26.2 | 19.8 | 21.4 | 24.0 | 31.5 | 109.6 | SC | BLRCS200A240B44 |
| 20.7 | 22.2 | 25.0 | 32.8 | 24.8 | 26.7 | 30.0 | 39.4 | 137.0 | SC | BLRCS250A300B44 |
| 23.6 | 25.4 | 28.5 | 37.4 | 28.3 | 30.4 | 34.2 | 44.9 | 156.1 | SC | BLRCS285A342B44 |
| 25.0 | 27.0 | 30.3 | 39.8 | 30.0 | 32.3 | 36.4 | 47.7 | 166.0 | SC | BLRCS303A364B44 |

| Rated Voltage 480 V | | | | | | | | | | |
|-----------------------|-------|-------|-----------------------------|-----------------------|-------|-------|-----------------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) at 480 V | Q _N (kvar) | | | I _N (A) at 480 V | | | |
| 400 V | 415 V | 480 V | | 400 V | 440 V | 480 V | | | | |
| 2.9 | 3.1 | 4.2 | 5.1 | 3.5 | 4.2 | 5.0 | 6.1 | 19.3 | HC | BLRCS042A050B48 |
| 4.7 | 5.0 | 6.7 | 8.1 | 5.6 | 6.8 | 8.0 | 9.7 | 30.8 | HC | BLRCS067A080B48 |
| 5.1 | 5.5 | 7.5 | 8.9 | 6.2 | 7.5 | 9.0 | 10.7 | 34.1 | LC | BLRCS075A090B48 |
| 6.1 | 6.6 | 8.8 | 10.6 | 7.3 | 8.9 | 10.6 | 12.7 | 40.5 | LC | BLRCS088A106B48 |
| 7.2 | 7.8 | 10.4 | 12.5 | 8.7 | 10.5 | 12.5 | 15.0 | 47.9 | MC | BLRCS104A125B48 |
| 8.7 | 9.3 | 12.5 | 15.0 | 10.4 | 12.6 | 15.0 | 18.0 | 57.5 | NC | BLRCS125A150B48 |
| 10.0 | 10.8 | 14.4 | 17.3 | 12.0 | 14.5 | 17.3 | 20.8 | 66.3 | NC | BLRCS144A173B48 |
| 10.8 | 11.6 | 15.5 | 18.6 | 12.9 | 15.6 | 18.6 | 22.4 | 71.4 | NC | BLRCS155A186B48 |
| 11.8 | 12.7 | 17.0 | 20.4 | 14.2 | 17.1 | 20.4 | 24.5 | 78.3 | NC | BLRCS170A204B48 |
| 12.9 | 13.9 | 18.6 | 22.4 | 15.5 | 18.8 | 22.3 | 26.9 | 85.6 | SC | BLRCS186A223B48 |
| 14.4 | 15.5 | 20.8 | 25.0 | 17.3 | 21.0 | 25.0 | 30.0 | 95.7 | SC | BLRCS208A250B48 |
| 17.9 | 19.3 | 25.8 | 31.0 | 21.5 | 26.0 | 31.0 | 37.2 | 118.8 | SC | BLRCS258A310B48 |
| 20.0 | 21.5 | 28.8 | 34.6 | 24.0 | 29.0 | 34.6 | 41.6 | 132.6 | VC | BLRCS288A346B48 |
| 21.9 | 23.5 | 31.5 | 37.9 | 26.3 | 31.8 | 37.8 | 45.5 | 145.0 | VC | BLRCS315A378B48 |
| 23.5 | 25.3 | 33.9 | 40.8 | 28.3 | 34.2 | 40.7 | 48.9 | 156.1 | XC | BLRCS339A407B48 |

| Rated Voltage 525 V | | | | | | | | | | |
|-----------------------|-------|-------|-----------------------------|-----------------------|-------|-------|-----------------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) at 525 V | Q _N (kvar) | | | I _N (A) at 525 V | | | |
| 415 V | 480 V | 525 V | | 400 V | 480 V | 525 V | | | | |
| 3.1 | 4.2 | 5.0 | 5.5 | 3.5 | 5.0 | 6.0 | 6.6 | 19.2 | HC | BLRCS050A060B52 |
| 6.6 | 8.9 | 10.6 | 11.7 | 7.4 | 10.6 | 12.7 | 14.0 | 40.8 | MC | BLRCS106A127B52 |
| 7.8 | 10.4 | 12.5 | 13.7 | 8.7 | 12.5 | 15.0 | 16.5 | 48.1 | NC | BLRCS125A150B52 |
| 9.6 | 12.9 | 15.4 | 16.9 | 10.7 | 15.4 | 18.5 | 20.3 | 59.3 | NC | BLRCS154A185B52 |
| 12.5 | 16.7 | 20.0 | 22.0 | 13.9 | 20.1 | 24.0 | 26.4 | 77.0 | SC | BLRCS200A240B52 |
| 15.6 | 20.9 | 25.0 | 27.5 | 17.4 | 25.1 | 30.0 | 33.0 | 96.2 | SC | BLRCS250A300B52 |

EasyCan harmonic applications

Three Phase Applications

EasyCan capacitors are designed to work in slightly polluted networks with detuned reactors. 480 and 525V range of EasyCan is designed to work with detuned reactors in 400V.

Operating conditions

- For slightly polluted networks.
- Slight voltage disturbances.
- Need of switching frequency up to 5 000 /year.

Rated voltage

In a detuned filter application, the voltage across the capacitors is higher than the network service voltage (U_s). Then, capacitors must be designed to withstand higher voltages.

Depending on the selected tuning frequency, part of the harmonic currents are absorbed by the detuned capacitor bank. Then, capacitors must be designed to withstand higher currents, combining fundamental and harmonic currents.

The rated voltage of EasyCan capacitors is given in the table below, for different values of network service voltage and relative impedance.

| Capacitor Rated Voltage U_N (V) | Network Service Voltage U_s (V) | |
|-----------------------------------|-----------------------------------|-------|
| | 50 Hz | 60 Hz |
| | 400 | 400 |
| Relative Impedance (%) | | |
| 5.7 | 480 | 480 |
| 7 | | |
| 14 | 480 | 480 |

In the following pages, the effective power (kvar) given in the tables is the reactive power provided by the combination of capacitors and reactors.



Detuned reactor

EasyCan

EasyCan + Detuned Reactor + Contactor + MCCB

PE30194_L261_eps



EasyCan0330py_eps



28_PB107181_eps



PB106447_02.jpg



| Network 400 V, 50 Hz Capacitor Voltage 480 V 5.7 % / 7 % Detuned Filter | | | | | | |
|---|-------------------------|---------------------|------------------|------------------|---------------------------|--|
| Effective Power (kvar) | Q _N at 480 V | Capacitor Ref. | 5.7% fr = 215Hz | 7% fr = 190Hz | Switching: Contactor Ref. | Protection: Easypact CVS (I _{cu} =36kA)Ref. |
| | | | D R Ref | D R Ref. | | |
| 6.5 | 8.8 | BLRCS088A106B48 × 1 | LVR05065A40T × 1 | LVR07065A40T × 1 | LC1D12 × 1 | LV510330 × 1 |
| 12.5 | 17 | BLRCS170A204B48 × 1 | LVR05125A40T × 1 | LVR07125A40T × 1 | LC1D18 × 1 | LV510331 × 1 |
| 25 | 33.9 | BLRCS339A407B48 × 1 | LVR05250A40T × 1 | LVR07250A40T × 1 | LC1D38 × 1 | LV510334 × 1 |
| 50 | 67.9 | BLRCS339A407B48 × 2 | LVR05500A40T × 1 | LVR07500A40T × 1 | LC1D95 × 1 | LV510337 × 1 |
| 100 | 136 | BLRCS339A407B48 × 4 | LVR05X00A40T × 1 | LVR07X00A40T × 1 | LC1F185 × 1 | LV525332 × 1 |

| Network 400 V, 50 Hz Capacitor Voltage 480 V 14 % Detuned Filter | | | | | | |
|--|-------------------------|---------------------|------------------|---------------------------|--|--|
| Effective Power (kvar) | Q _N at 480 V | Capacitor Ref. | 14% fr = 135Hz | Switching: Contactor Ref. | Protection: Easypact CVS (I _{cu} =36kA)Ref. | |
| | | | D R Ref | | | |
| 6.5 | 8.8 | BLRCS088A106B48 × 1 | LVR14065A40T × 1 | LC1D12 × 1 | LV510330 × 1 | |
| 12.5 | 15.5 | BLRCS155A186B48 × 1 | LVR14125A40T × 1 | LC1D18 × 1 | LV510331 × 1 | |
| 25 | 31.5 | BLRCS315A378B48 × 1 | LVR14250A40T × 1 | LC1D38 × 1 | LV510334 × 1 | |
| 50 | 63 | BLRCS315A378B48 × 2 | LVR14500A40T × 1 | LC1D95 × 1 | LV510337 × 1 | |
| 100 | 126 | BLRCS315A378B48 × 4 | LVR14X00A40T × 1 | LC1F185 × 1 | LV525332 × 1 | |

| Network 400 V, 50 Hz Capacitor Voltage 525 V 5.7 % / 7 % Detuned Filter | | | | | | |
|---|-------------------------|---------------------|------------------|------------------|---------------------------|---|
| Effective Power (kvar) | Q _N at 525 V | Capacitor Ref. | 5.7% fr = 215Hz | 7% fr = 190Hz | Switching: Contactor Ref. | Protection: Easypact CVS (I _{cu} =36kA) Ref. |
| | | | D R Ref | D R Ref. | | |
| 6.5 | 10.6 | BLRCS106A127B52 × 1 | LVR05065A40T × 1 | LVR07065A40T × 1 | LC1D12 × 1 | LV510330 × 1 |
| 12.5 | 20 | BLRCS200A240B52 × 1 | LVR05125A40T × 1 | LVR07125A40T × 1 | LC1D18 × 1 | LV510331 × 1 |
| 25 | 40 | BLRCS200A240B52 × 2 | LVR05250A40T × 1 | LVR07250A40T × 1 | LC1D38 × 1 | LV510334 × 1 |
| 50 | 80 | BLRCS200A240B52 × 4 | LVR05500A40T × 1 | LVR07500A40T × 1 | LC1D95 × 1 | LV510337 × 1 |
| 100 | 160 | BLRCS200A240B52 × 8 | LVR05X00A40T × 1 | LVR07X00A40T × 1 | LC1F185 × 1 | LV525332 × 1 |

| Network 400 V, 50 Hz Capacitor Voltage 525 V 14 % Detuned Filter | | | | | | |
|--|-------------------------|---------------------|------------------|---------------------------|--|--|
| Effective Power (kvar) | Q _N at 525 V | Capacitor Ref. | 14% fr = 135Hz | Switching: Contactor Ref. | Protection: Easypact CVS (I _{cu} =36kA)Ref. | |
| | | | D R Ref. | | | |
| 6.5 | 10.6 | BLRCS106A127B52 × 1 | LVR14065A40T × 1 | LC1D12 × 1 | LV510330 × 1 | |
| 12.5 | 20 | BLRCS200A240B52 × 1 | LVR14125A40T × 1 | LC1D18 × 1 | LV510331 × 1 | |
| 25 | 40 | BLRCS200A240B52 × 2 | LVR14250A40T × 1 | LC1D38 × 1 | LV510334 × 1 | |
| 50 | 75 | BLRCS250A300B52 × 3 | LVR14500A40T × 1 | LC1D95 × 1 | LV510337 × 1 | |
| 100 | 150 | BLRCS250A300B52 × 6 | LVR14X00A40T × 1 | LC1F185 × 1 | LV525332 × 1 | |

EasyCan + Detuned Reactor + Contactor + MCCB

PEB015d_L2d_1eps



| Network 400 V, 60 Hz Capacitor Voltage 480 V 5.7 % / 7 % Detuned Filter | | | | | | | |
|---|-------------------------|---------------------|------------------|------------------|---------------|---------------------------|--|
| Effective Power (kvar) | Q _N at 480 V | Capacitor Ref. | 5.7% fr = 250Hz | | 7% fr = 230Hz | Switching: Contactor Ref. | Protection: Easypact CVS (I _{cu} =36kA)Ref. |
| | | | D R Ref | D R Ref | | | |
| 12.5 | 17.3 | BLRCS144A173B48 × 1 | LVR05125B40T × 1 | LVR07125B40T × 1 | LC1D18 × 1 | LV510331 × 1 | |
| 25 | 34.6 | BLRCS288A346B48 × 1 | LVR05250B40T × 1 | LVR07250B40T × 1 | LC1D38 × 1 | LV510334 × 1 | |
| 50 | 69.2 | BLRCS288A346B48 × 2 | LVR05500B40T × 1 | LVR07500B40T × 1 | LC1D95 × 1 | LV510337 × 1 | |
| 100 | 138.4 | BLRCS288A346B48 × 4 | LVR05X00B40T × 1 | LVR07X00B40T × 1 | LC1F185 × 1 | LV525332 × 1 | |



EasyCan03copyeps



| Network 400 V, 60 Hz Capacitor Voltage 480 V 14 % Detuned Filter | | | | | | |
|--|-------------------------|---------------------|------------------|--|---------------------------|--|
| Effective Power (kvar) | Q _N at 480 V | Capacitor Ref. | 14% fr = 160Hz | | Switching: Contactor Ref. | Protection: Easypact CVS (I _{cu} =36kA)Ref. |
| | | | D R Ref. | | | |
| 12.5 | 16.3 | BLRCS136A163B48 × 1 | LVR14125B40T × 1 | | LC1D18 × 1 | LV510331 × 1 |
| 25 | 31 | BLRCS258A310B48 × 1 | LVR14250B40T × 1 | | LC1D38 × 1 | LV510334 × 1 |
| 50 | 62 | BLRCS258A310B48 × 2 | LVR14500B40T × 1 | | LC1D95 × 1 | LV510337 × 1 |
| 100 | 124 | BLRCS258A310B48 × 4 | LVR14X00B40T × 1 | | LC1F185 × 1 | LV525332 × 1 |



28_PEB1075B1 eps



PEB064d7-02.jpg



A safe, reliable, high-performance and flexible solution for power factor correction in stringent operating conditions to maximise your savings

Copyright© Schneider Electric



VarPlus Can

Operating conditions

- For networks with insignificant non-linear loads: ($N_{LL} < 20\%$).
- Significant voltage disturbances.
- Standard operating temperature up to 55 °C.
- Normal switching frequency up to 7000 /year.
- Over current handling(including harmonics) up to $1.8 \times I_N$.

High performance and flexibility with VarPlus Can

- Power ratings up to 57.1 kvar in single can and compactness across the range to reduce your cubicle space up to 40%.
- Build your type tested Schneider electric solution with VarPlus Can – Prisma, Blokset and Okken.
- In-built user assistance and warnings on the product for a delight user experience.
- Flexibility in Vertical and horizontal mounting.
- 3 Phase disconnection of Pressure sensitive disconnecter at the end of life which is independent of mechanical assembly for safety and reliability.
- Use of special conductors in stacked design impregnated in resin to ensure better cooling and enhanced life.
- Metallized polypropylene with wave cut and heavy edge technology to handle over current conditions in harsh environments.
- Specially formulated sticky resin to increase the mechanical stability of capacitor elements for higher rating capacitors to ensure better cooling and extended life.
- Designed for high performance in harsh environment to ensure 30% extended life compared to standard capacitors.

Safety

- Self-healing.
- Pressure-sensitive disconnecter on all three phases independent of mechanical assembly.
- Tamper resistant non-assessible in-built discharge resistors.
- Unique Finger-proof New CLAMPTITE terminals to reduce risk of accidental contact and to ensure firm termination (10 to 30 kvar) and maintained tightness.
- Special film resistivity and metallization profile for higher thermal efficiency, lower temperature rise and enhanced life expectancy.

Technology

VarPlus Can capacitors are constructed internally with single-phase capacitor elements. Each capacitor element is manufactured with metallized polypropylene film as the dielectric, having features such as heavy edge, slope metallization and wave-cut profile to ensure increased current handling capacity and reduced temperature rise.

Sticky resin which give good thermal conductivity and mechanical stability allows the capacitor to carry higher overloads.

Stud type terminals are designed for handling higher currents for capacitors more than 30kvar.

The unique finger-proof CLAMPTITE termination is fully integrated with discharge resistors, allowing suitable access for tightening and ensuring cable termination without any loose connections.

For lower ratings, double fast-on terminals with wires are provided.

Benefits

- Save panel space due to its compact design and range.
- High Performance & Long life.
- High over current handling.
- Unique disconnection system and in-built discharge device.
- Flexibility in installation - upright and horizontal.

VarPlus Can

3 Phase Capacitors

VarPlus Can02 copy 01 eps



VarPlus Can02 copy 01 eps



Technical specifications

General characteristics

| | | |
|-----------------------|--------------------------------------|--|
| Standards | IEC 60831-1/2 | |
| Voltage range | 230 to 830 V | |
| Frequency | 50 / 60 Hz | |
| Power range | 1 to 57.1 kvar | |
| Losses (dielectric) | < 0.2 W/kvar | |
| Losses (total) | < 0.5 W/kvar | |
| Capacitance tolerance | -5%, +10% | |
| Voltage test | Between terminals | 2.15 x U _N (AC), 10 s |
| | Between terminal & container | ≤ 525 V: 3 kV (AC), 10 s or 3.66 kV (AC), 2 s > 525 V: 3.66 kV (AC), 10 s or 4.4 kV (AC), 2 s |
| | Impulse voltage | ≤ 690 V: 8 kV > 690 V: 12 kV |
| Discharge resistor | Fitted, standard discharge time 60 s | |

Working conditions

| | |
|-----------------------------|---|
| Ambient temperature | -25 / 55 °C (Class D) |
| Humidity | 95 % |
| Altitude | 2,000 m above sea level |
| Overvoltage | 1.1 x U _N 8 h in every 24 h |
| Overcurrent | Up to 1.8 x I _N |
| Peak inrush current | 250 x I _N |
| Switching operations (max.) | Up to 7,000 switching operations per year |
| Mean Life expectancy | Up to 130,000 hrs |
| Harmonic content withstand | N _{LL} ≤ 20 % |

Installation characteristics

| | |
|-------------------|--|
| Mounting position | Indoor, upright & horizontal |
| Fastening | Threaded M12 stud at the bottom |
| Earthing | |
| Terminals | CLAMPTITE - three-way terminal with electric shock protection (finger-proof) and, double fast-on terminal in lower kvar and stud type for higher power ratings |

Safety features

| | |
|------------|---|
| Safety | Self-healing + Pressure-sensitive disconnecter + Discharge device |
| Protection | IP20 (for fast-on and clamptite terminal) |

Construction

| | |
|--------------|--|
| Casing | Extruded Aluminium Can |
| Dielectric | Metallized polypropylene film with Zn/Al alloy. Special resistivity & profile, special edge (wave-cut) |
| Impregnation | Non-PCB, polyurethane sticky resin (Dry) |

⚠ WARNING

HAZARD OF ELECTRICAL SHOCK

Wait 5 minutes after isolating supply before handling

 Failure to follow these instructions can result in injury or equipment damage

| Rated Voltage 240/260 V | | | | | | | | | | |
|-------------------------|-------|-------|-----------------------------|-----------------------|-------|-------|-----------------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) at 260 V | Q _N (kvar) | | | I _N (A) at 260 V | | | |
| 230 V | 240 V | 260 V | | 230 V | 240 V | 260 V | | | | |
| 1.9 | 2.1 | 2.5 | 5.5 | 2.3 | 2.5 | 3.0 | 6.6 | 38.7 | HC | BLRCH021A025B24 |
| 2.5 | 2.7 | 3.2 | 7.0 | 3.0 | 3.3 | 3.8 | 8.4 | 49.7 | HC | BLRCH027A033B24 |
| 3.9 | 4.2 | 4.9 | 10.9 | 4.6 | 5.0 | 5.9 | 13.1 | 77.3 | HC | BLRCH042A050B24 |
| 5.0 | 5.4 | 6.3 | 14.1 | 6.0 | 6.5 | 7.6 | 16.9 | 99.4 | MC | BLRCH054A065B24 |
| 5.8 | 6.3 | 7.4 | 16.4 | 6.9 | 7.5 | 8.8 | 19.5 | 116.0 | RC | BLRCH063A075B24 |
| 7.6 | 8.3 | 9.7 | 21.6 | 9.2 | 10.0 | 11.7 | 26.1 | 152.4 | RC | BLRCH083A100B24 |
| 10.0 | 10.9 | 12.8 | 28.4 | 12.0 | 13.0 | 15.3 | 34.1 | 200.5 | TC | BLRCH109A130B24 |
| 10.7 | 11.7 | 13.7 | 30.4 | 12.9 | 14.0 | 16.4 | 36.5 | 214.8 | TC | BLRCH117A140B24 |
| 12.0 | 13.1 | 15.4 | 34.1 | 14.4 | 15.7 | 18.4 | 40.9 | 240.9 | TC | BLRCH131A157B24 |

| Rated Voltage 380/400/415 V | | | | | | | | | | |
|-----------------------------|-------|-------|-----------------------------|-----------------------|-------|-------|-----------------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) at 400 V | Q _N (kvar) | | | I _N (A) at 400 V | | | |
| 380 V | 400 V | 415 V | | 380 V | 400 V | 415 V | | | | |
| 2.3 | 2.5 | 2.7 | 3.6 | 2.7 | 3.0 | 3.2 | 4.3 | 16.6 | DC | BLRCH025A030B40 |
| 2.7 | 3.0 | 3.2 | 4.3 | 3.2 | 3.6 | 3.9 | 5.2 | 19.9 | DC | BLRCH030A036B40 |
| 4.5 | 5.0 | 5.4 | 7.2 | 5.4 | 6.0 | 6.5 | 8.7 | 33.1 | HC | BLRCH050A060B40 |
| 5.7 | 6.3 | 6.8 | 9.1 | 6.8 | 7.5 | 8.1 | 10.8 | 41.8 | HC | BLRCH063A075B40 |
| 6.8 | 7.5 | 8.1 | 10.8 | 8.1 | 9.0 | 9.7 | 13.0 | 49.7 | HC | BLRCH075A090B40 |
| 7.5 | 8.3 | 8.9 | 12.0 | 9.0 | 10.0 | 10.7 | 14.4 | 55.0 | LC | BLRCH083A100B40 |
| 9.4 | 10.4 | 11.2 | 15.0 | 11.3 | 12.5 | 13.4 | 18.0 | 68.9 | MC | BLRCH104A125B40 |
| 11.3 | 12.5 | 13.5 | 18.0 | 13.5 | 15.0 | 16.1 | 21.7 | 82.9 | RC | BLRCH125A150B40 |
| 13.5 | 15.0 | 16.1 | 21.7 | 16.2 | 18.0 | 19.4 | 26.0 | 99.4 | RC | BLRCH150A180B40 |
| 15.1 | 16.7 | 18.0 | 24.1 | 18.1 | 20.0 | 21.6 | 28.9 | 110.7 | TC | BLRCH167A200B40 |
| 18.1 | 20.0 | 21.5 | 28.9 | 21.7 | 24.0 | 25.8 | 34.6 | 132.6 | TC | BLRCH200A240B40 |
| 18.8 | 20.8 | 22.4 | 30.0 | 22.5 | 25.0 | 26.9 | 36.0 | 137.9 | TC | BLRCH208A250B40 |
| 22.6 | 25.0 | 26.9 | 36.1 | 27.1 | 30.0 | 32.3 | 43.3 | 165.7 | TC | BLRCH250A300B40 |
| 27.1 | 30.0 | 32.3 | 43.3 | 32.5 | 36.0 | 38.8 | 52.0 | 198.9 | VC | BLRCH300A360B40 |
| 30.1 | 33.3 | 35.8 | 48.1 | 36.1 | 40.0 | 43.0 | 57.7 | 220.7 | VC | BLRCH333A400B40 |
| 36.1 | 40.0 | 43.1 | 57.7 | 43.3 | 48.0 | 51.7 | 69.3 | 265.2 | YC | BLRCH400A480B40 |
| 37.6 | 41.7 | 44.9 | 60.2 | 45.2 | 50.0 | 53.9 | 72.2 | 276.4 | YC | BLRCH417A500B40 |
| 45.1 | 50.0 | 53.8 | 72.2 | --- | --- | --- | --- | 331.4 | YC | BLRCH500A000B40 |

| Rated Voltage 440 V | | | | | | | | | | |
|-----------------------|-------|-------|-----------------------------|-----------------------|-------|-------|-----------------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) at 440 V | Q _N (kvar) | | | I _N (A) at 440 V | | | |
| 400 V | 415 V | 440 V | | 400 V | 415 V | 440 V | | | | |
| 4.1 | 4.4 | 5.0 | 6.6 | 5.0 | 5.3 | 6.0 | 7.9 | 27.4 | HC | BLRCH050A060B44 |
| 6.2 | 6.7 | 7.5 | 9.8 | 7.4 | 8.0 | 9.0 | 11.8 | 41.1 | HC | BLRCH075A090B44 |
| 8.3 | 8.9 | 10.0 | 13.1 | 9.9 | 10.7 | 12.0 | 15.7 | 54.8 | MC | BLRCH100A120B44 |
| 10.3 | 11.1 | 12.5 | 16.4 | 12.4 | 13.3 | 15.0 | 19.7 | 68.5 | RC | BLRCH125A150B44 |
| 11.8 | 12.7 | 14.3 | 18.8 | 14.2 | 15.3 | 17.2 | 22.5 | 78.3 | RC | BLRCH143A172B44 |
| 12.4 | 13.3 | 15.0 | 19.7 | 14.9 | 16.0 | 18.0 | 23.6 | 82.2 | RC | BLRCH150A180B44 |
| 14.0 | 15.0 | 16.9 | 22.2 | 16.8 | 18.0 | 20.3 | 26.6 | 92.6 | TC | BLRCH169A203B44 |
| 15.0 | 16.2 | 18.2 | 23.9 | 18.0 | 19.4 | 21.8 | 28.7 | 99.7 | TC | BLRCH182A218B44 |
| 16.5 | 17.8 | 20.0 | 26.2 | 19.8 | 21.4 | 24.0 | 31.5 | 109.6 | TC | BLRCH200A240B44 |
| 20.7 | 22.2 | 25.0 | 32.8 | 24.8 | 26.7 | 30.0 | 39.4 | 137.0 | TC | BLRCH250A300B44 |
| 23.6 | 25.4 | 28.5 | 37.4 | 28.3 | 30.4 | 34.2 | 44.9 | 156.1 | VC | BLRCH285A342B44 |
| 25.0 | 27.0 | 30.3 | 39.8 | --- | --- | --- | --- | 166.0 | VC | BLRCH303A000B44 |
| 26.0 | 28.0 | 31.5 | 41.3 | 31.2 | 33.6 | 37.8 | 49.6 | 172.6 | VC | BLRCH315A378B44 |
| 27.7 | 29.8 | 33.5 | 44.0 | 33.2 | 35.8 | 40.1 | 52.7 | 183.5 | VC | BLRCH335A401B44 |
| 33.1 | 35.6 | 40.0 | 52.5 | 39.7 | 42.7 | 48.0 | 63.0 | 219.1 | XC | BLRCH400A480B44 |
| 41.3 | 44.5 | 50.0 | 65.6 | 49.6 | 53.4 | --- | --- | 273.9 | YC | BLRCH500A000B44 |
| 47.2 | 50.8 | 57.1 | 74.9 | 56.6 | 61.0 | --- | --- | 312.8 | YC | BLRCH571A000B44 |

VarPlus Can

3 Phase Capacitors

| Rated Voltage 480 V | | | | | | | | | | |
|-----------------------|-------|-------|-----------------------------|-----------------------|-------|-------|-----------------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | µF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) at 480 V | Q _N (kvar) | | | I _N (A) at 480 V | | | |
| 400 V | 415 V | 480 V | | 400 V | 440 V | 480 V | | | | |
| 2.9 | 3.1 | 4.2 | 5.1 | 3.5 | 4.2 | 5.0 | 6.1 | 19.3 | DC | BLRCH042A050B48 |
| 3.5 | 3.7 | 5.0 | 6.0 | 4.2 | 5.0 | 6.0 | 7.2 | 23.0 | HC | BLRCH050A060B48 |
| 5.2 | 5.6 | 7.5 | 9.0 | 6.3 | 7.6 | 9.0 | 10.8 | 34.5 | HC | BLRCH075A090B48 |
| 6.1 | 6.6 | 8.8 | 10.6 | 7.3 | 8.9 | 10.6 | 12.7 | 40.5 | LC | BLRCH088A106B48 |
| 7.2 | 7.8 | 10.4 | 12.5 | 8.7 | 10.5 | 12.5 | 15.0 | 47.9 | MC | BLRCH104A125B48 |
| 7.8 | 8.4 | 11.3 | 13.6 | 9.4 | 11.4 | 13.6 | 16.3 | 52.0 | RC | BLRCH113A136B48 |
| 8.7 | 9.3 | 12.5 | 15.0 | 10.4 | 12.6 | 15.0 | 18.0 | 57.5 | RC | BLRCH125A150B48 |
| 9.4 | 10.2 | 13.6 | 16.4 | 11.3 | 13.7 | 16.3 | 19.6 | 62.6 | RC | BLRCH136A163B48 |
| 10.0 | 10.8 | 14.4 | 17.3 | 12.0 | 14.5 | 17.3 | 20.8 | 66.3 | RC | BLRCH144A173B48 |
| 10.8 | 11.6 | 15.5 | 18.6 | 12.9 | 15.6 | 18.6 | 22.4 | 71.4 | RC | BLRCH155A186B48 |
| 11.8 | 12.7 | 17.0 | 20.4 | 14.2 | 17.1 | 20.4 | 24.5 | 78.3 | RC | BLRCH170A204B48 |
| 12.5 | 13.5 | 18.0 | 21.7 | 15.0 | 18.2 | 21.6 | 26.0 | 82.9 | TC | BLRCH180A216B48 |
| 13.3 | 14.4 | 19.2 | 23.1 | 16.0 | 19.4 | 23.0 | 27.7 | 88.4 | TC | BLRCH192A230B48 |
| 14.4 | 15.5 | 20.8 | 25.0 | 17.3 | 21.0 | 25.0 | 30.0 | 95.7 | TC | BLRCH208A250B48 |
| 15.8 | 17.0 | 22.7 | 27.3 | 18.9 | 22.9 | 27.2 | 32.8 | 104.5 | TC | BLRCH227A272B48 |
| 17.9 | 19.3 | 25.8 | 31.0 | 21.5 | 26.0 | 31.0 | 37.2 | 118.8 | TC | BLRCH258A310B48 |
| 20.0 | 21.5 | 28.8 | 34.6 | 24.0 | 29.0 | 34.6 | 41.6 | 132.6 | VC | BLRCH288A346B48 |
| 21.9 | 23.5 | 31.5 | 37.9 | 26.3 | 31.8 | 37.8 | 45.5 | 145.0 | VC | BLRCH315A378B48 |
| 23.5 | 25.3 | 33.9 | 40.8 | 28.3 | 34.2 | 40.7 | 48.9 | 156.1 | XC | BLRCH339A407B48 |

| Rated Voltage 525 V | | | | | | | | | | |
|-----------------------|-------|-------|-----------------------------|-----------------------|-------|-------|-----------------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | µF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) at 525 V | Q _N (kvar) | | | I _N (A) at 525 V | | | |
| 415 V | 480 V | 525 V | | 400 V | 480 V | 525 V | | | | |
| 3.1 | 4.2 | 5.0 | 5.5 | 3.5 | 5.0 | 6.0 | 6.6 | 19.2 | HC | BLRCH050A060B52 |
| 6.6 | 8.9 | 10.6 | 11.7 | 7.4 | 10.6 | 12.7 | 14.0 | 40.8 | MC | BLRCH106A127B52 |
| 7.8 | 10.4 | 12.5 | 13.7 | 8.7 | 12.5 | 15.0 | 16.5 | 48.1 | RC | BLRCH125A150B52 |
| 9.4 | 12.5 | 15.0 | 16.5 | 10.4 | 15.0 | 18.0 | 19.8 | 57.7 | RC | BLRCH150A180B52 |
| 10.7 | 14.4 | 17.2 | 18.9 | 12.0 | 17.3 | 20.6 | 22.7 | 66.2 | RC | BLRCH172A206B52 |
| 11.6 | 15.5 | 18.5 | 20.3 | 12.9 | 18.6 | 22.2 | 24.4 | 71.2 | TC | BLRCH185A222B52 |
| 12.5 | 16.7 | 20.0 | 22.0 | 13.9 | 20.1 | 24.0 | 26.4 | 77.0 | TC | BLRCH200A240B52 |
| 15.6 | 20.9 | 25.0 | 27.5 | 17.4 | 25.1 | 30.0 | 33.0 | 96.2 | TC | BLRCH250A300B52 |
| 19.3 | 25.8 | 30.9 | 34.0 | 21.5 | 31.0 | 37.1 | 40.8 | 118.9 | VC | BLRCH309A371B52 |
| 21.5 | 28.8 | 34.4 | 37.8 | 24.0 | 34.5 | 41.3 | 45.4 | 132.4 | VC | BLRCH344A413B52 |
| 23.6 | 31.5 | 37.7 | 41.5 | 26.3 | 37.8 | 45.2 | 49.8 | 145.1 | VC | BLRCH377A452B52 |
| 25.0 | 33.4 | 40.0 | 44.0 | 27.9 | 40.1 | 48.0 | 52.8 | 153.9 | XC | BLRCH400A480B52 |

| Rated Voltage 575 V | | | | | | | | | | |
|-----------------------|-------|-------|-----------------------------|-----------------------|-------|-------|-----------------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | µF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) at 575 V | Q _N (kvar) | | | I _N (A) at 575 V | | | |
| 480 V | 550 V | 575 V | | 480 V | 550 V | 575 V | | | | |
| 8.4 | 11.0 | 12.0 | 12.0 | 9.3 | 13.2 | 14.4 | 14.5 | 38.5 | RC | BLRCH120A144B57 |
| 10.5 | 13.7 | 15.0 | 15.1 | 11.7 | 16.5 | 18.0 | 18.1 | 48.1 | TC | BLRCH150A180B57 |
| 20.3 | 26.7 | 29.2 | 29.3 | 22.7 | 32.0 | 35.0 | 35.1 | 93.6 | VC | BLRCH292A350B57 |

| Rated Voltage 600 V | | | | | | | | | | |
|-----------------------|-------|-------|-----------------------------|-----------------------|-------|-------|-----------------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) at 600 V | Q _N (kvar) | | | I _N (A) at 600 V | | | |
| 480 V | 550 V | 600 V | | 480 V | 550 V | 600 V | | | | |
| 5.3 | 7.0 | 8.3 | 8.8 | 6.4 | 8.4 | 10.0 | 9.6 | 24.5 | RC | BLRCH083A100B60 |
| 6.7 | 8.7 | 10.4 | 11.0 | 8.0 | 10.5 | 12.5 | 12.0 | 30.6 | TC | BLRCH104A125B60 |
| 8.0 | 10.5 | 12.5 | 11.7 | 9.6 | 12.6 | 15.0 | 14.4 | 36.8 | TC | BLRCH125A150B60 |
| 13.3 | 17.5 | 20.8 | 14.8 | 16.0 | 21.0 | 25.0 | 24.0 | 61.3 | VC | BLRCH208A250B60 |

| Rated Voltage 690 V | | | | | | | | | | |
|-----------------------|-------|-------|-----------------------------|-----------------------|-------|-------|-----------------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) at 690 V | Q _N (kvar) | | | I _N (A) at 690 V | | | |
| 480 V | 600 V | 690 V | | 480 V | 600 V | 690 V | | | | |
| 5.4 | 8.4 | 11.1 | 9.3 | 6.4 | 10.1 | 13.3 | 11.1 | 24.7 | RC | BLRCH111A133B69 |
| 6.0 | 9.5 | 12.5 | 10.5 | 7.3 | 11.3 | 15.0 | 12.6 | 27.8 | RC | BLRCH125A150B69 |
| 6.7 | 10.4 | 13.8 | 11.5 | 8.0 | 12.5 | 16.5 | 13.8 | 30.6 | TC | BLRCH138A165B69 |
| 7.3 | 11.3 | 15.0 | 12.6 | 8.7 | 13.6 | 18.0 | 15.1 | 33.4 | TC | BLRCH150A180B69 |
| 9.7 | 15.1 | 20.0 | 16.7 | 11.6 | 18.1 | 24.0 | 20.1 | 44.6 | TC | BLRCH200A240B69 |
| 12.1 | 18.9 | 25.0 | 20.9 | 14.5 | 22.7 | 30.0 | 25.1 | 55.7 | VC | BLRCH250A300B69 |
| 13.3 | 20.9 | 27.6 | 23.1 | 16.0 | 25.0 | 33.1 | 27.7 | 61.4 | VC | BLRCH276A331B69 |
| 14.5 | 22.7 | 30.0 | 25.1 | 17.4 | 27.2 | 36.0 | 30.1 | 66.8 | VC | BLRCH300A360B69 |

| Rated Voltage 830 V | | | | | | | | | | |
|-----------------------|-------|-------|-----------------------------|-----------------------|-------|-------|-----------------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) at 830 V | Q _N (kvar) | | | I _N (A) at 830 V | | | |
| 600 V | 690 V | 830 V | | 600 V | 690 V | 830 V | | | | |
| 8.9 | 11.8 | 17.1 | 11.9 | 10.7 | 14.2 | 20.5 | 14.3 | 79.2 | VC | BLRCH171A205B83 |

VarPlus Can harmonic applications

3 Phase Applications

VarPlus Can capacitors are designed for applications where higher number of non-linear loads are present. Higher current carrying capacity in VarPlus Can allows the operations in stringent conditions.

Operating conditions

- For networks with a large number of non-linear loads ($N_{LL} < 50\%$).
- Significant voltage disturbances.
- Significant switching frequency up to 7 000 /year.

Rated voltage

In a detuned filter application, the voltage across the capacitors is higher than the network service voltage (U_s). Then, capacitors must be designed to withstand higher voltages.

Depending on the selected tuning frequency, part of the harmonic currents are absorbed by the detuned capacitor bank. Then, capacitors must be designed to withstand higher currents, combining fundamental and harmonic currents.

The rated voltage of VarPlus Can capacitors is given in the table below, for different values of network service voltage and relative impedance.

| Capacitor Rated Voltage U_N (V) | | Network Service Voltage U_s (V) | | | | |
|-----------------------------------|-----|-----------------------------------|-----|-------|-----|-----|
| | | 50 Hz | | 60 Hz | | |
| | | 400 | 690 | 400 | 480 | 600 |
| Relative Impedance (%) | 5.7 | 480 | 830 | 480 | 575 | 690 |
| | 7 | 480 | - | 480 | - | - |
| | 14 | 480 | - | 480 | - | - |

In the following pages, the effective power (kvar) given in the tables is the reactive power provided by the combination of capacitors and reactors.

PE80154.eps



VarPlus Can 04 copy.eps

Detuned reactor

VarPlus Can

VarPlus Can + Detuned Reactor + Contactor + MCCB

FE0195_L28_eps



EasyCan03.coppy.eps



28_P6107861_eps



PE110417_eps



| Network 400 V, 50 Hz Capacitor Voltage 480 V 5.7 % / 7 % Detuned Filter | | | | | | |
|---|-------------------------|---------------------|------------------|------------------|---------------------------|--|
| Effective Power (kvar) | Q _N at 480 V | Capacitor Ref. | 5.7% fr = 215Hz | 7% fr = 190Hz | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =36kA) Ref. |
| | | | D R Ref. | D R Ref. | | |
| 6.5 | 8.8 | BLRCH088A106B48 × 1 | LVR05065A40T x 1 | LVR07065A40T x 1 | LC1D12 × 1 | LV429637 × 1 |
| 12.5 | 17 | BLRCH170A204B48 × 1 | LVR05125A40T x 1 | LVR07125A40T x 1 | LC1D18 × 1 | LV429636 × 1 |
| 25 | 33.9 | BLRCH339A407B48 × 1 | LVR05250A40T x 1 | LVR07250A40T x 1 | LC1D38 × 1 | LV429633 × 1 |
| 50 | 67.9 | BLRCH339A407B48 × 2 | LVR05500A40T x 1 | LVR07500A40T x 1 | LC1D95 × 1 | LV429630 × 1 |
| 100 | 136 | BLRCH339A407B48 × 4 | LVR05X00A40T x 1 | LVR07X00A40T x 1 | LC1F185 × 1 | LV431631 × 1 |

| Network 400 V, 50 Hz Capacitor Voltage 480 V 14 % Detuned Filter | | | | | | |
|--|-------------------------|---------------------|------------------|--|---------------------------|--|
| Effective Power (kvar) | Q _N at 480 V | Capacitor Ref. | 14% fr = 135Hz | | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =36kA) Ref. |
| | | | D R Ref. | | | |
| 6.5 | 8.8 | BLRCH088A106B48 × 1 | LVR14065A40T x 1 | | LC1D12 × 1 | LV429637 × 1 |
| 12.5 | 15.5 | BLRCH155A186B48 × 1 | LVR14125A40T x 1 | | LC1D18 × 1 | LV429636 × 1 |
| 25 | 31.5 | BLRCH315A378B48 × 1 | LVR14250A40T x 1 | | LC1D38 × 1 | LV429633 × 1 |
| 50 | 63 | BLRCH315A378B48 × 2 | LVR14500A40T x 1 | | LC1D95 × 1 | LV429630 × 1 |
| 100 | 126 | BLRCH315A378B48 × 4 | LVR14X00A40T x 1 | | LC1F185 × 1 | LV431631 × 1 |

| Network 400 V, 50 Hz Capacitor Voltage 525 V 5.7 % / 7 % Detuned Filter | | | | | | |
|---|-------------------------|---------------------|------------------|------------------|---------------------------|--|
| Effective Power (kvar) | Q _N at 525 V | Capacitor Ref. | 5.7% fr = 215Hz | 7% fr = 190Hz | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =36kA) Ref. |
| | | | D R Ref. | D R Ref. | | |
| 6.5 | 10.6 | BLRCH106A127B52 × 1 | LVR05065A40T x 1 | LVR07065A40T x 1 | LC1D12 × 1 | LV429637 × 1 |
| 12.5 | 20 | BLRCH200A240B52 × 1 | LVR05125A40T x 1 | LVR07125A40T x 1 | LC1D18 × 1 | LV429636 × 1 |
| 25 | 40 | BLRCH400A480B52 × 1 | LVR05250A40T x 1 | LVR07250A40T x 1 | LC1D38 × 1 | LV429633 × 1 |
| 50 | 80 | BLRCH400A480B52 × 2 | LVR05500A40T x 1 | LVR07500A40T x 1 | LC1D95 × 1 | LV429630 × 1 |
| 100 | 160 | BLRCH400A480B52 × 4 | LVR05X00A40T x 1 | LVR07X00A40T x 1 | LC1F185 × 1 | LV431631 × 1 |

| Network 400 V, 50 Hz Capacitor Voltage 525 V 14 % Detuned Filter | | | | | | |
|--|-------------------------|---------------------|------------------|--|---------------------------|--|
| Effective Power (kvar) | Q _N at 525 V | Capacitor Ref. | 14% fr = 135Hz | | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =36kA) Ref. |
| | | | D R Ref. | | | |
| 6.5 | 10.6 | BLRCH106A127B52 × 1 | LVR14065A40T x 1 | | LC1D12 × 1 | LV429637 × 1 |
| 12.5 | 18.5 | BLRCH185A222B52 × 1 | LVR14125A40T x 1 | | LC1D18 × 1 | LV429636 × 1 |
| 25 | 37.7 | BLRCH377A452B52 × 1 | LVR14250A40T x 1 | | LC1D38 × 1 | LV429633 × 1 |
| 50 | 75 | BLRCH377A452B52 × 2 | LVR14500A40T x 1 | | LC1D95 × 1 | LV429630 × 1 |
| 100 | 150 | BLRCH377A452B52 × 4 | LVR14X00A40T x 1 | | LC1F185 × 1 | LV431631 × 1 |

| Network 690 V, 50 Hz Capacitor Voltage 830 V 5.7 % / 7 % Detuned Filter | | | | | | |
|---|-------------------------|---------------------|------------------|------------------|---------------------------|--|
| Effective Power (kvar) | Q _N at 830 V | Capacitor Ref. | 5.7% fr = 215Hz | 7% fr = 190Hz | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =36kA) Ref. |
| | | | D R Ref. | D R Ref. | | |
| 12.5 | 17.1 | BLRCH171A205B83 × 1 | LVR05125A69T x 1 | LVR07125A69T x 1 | LC1D12 × 1 | LV429637 × 1 |
| 25 | 34.2 | BLRCH171A205B83 × 2 | LVR05250A69T x 1 | LVR07250A69T x 1 | LC1D25 × 1 | LV429635 × 1 |
| 50 | 68.4 | BLRCH171A205B83 × 4 | LVR05500A69T x 1 | LVR07500A69T x 1 | LC1D50 × 1 | LV429632 × 1 |
| 100 | 136.8 | BLRCH171A205B83 × 8 | LVR05X00A69T x 1 | LVR07X00A69T x 1 | LC1F85 × 1 | LV430631 × 1 |

VarPlus Can + Detuned Reactor + Contactor + MCCB

PEB015g_L2g_eps



| Network 400 V, 60 Hz Capacitor Voltage 480 V 5.7 % / 7 % Detuned Filter | | | | | | |
|---|-------------------------|---------------------|------------------|------------------|---------------------------|--|
| Effective Power (kvar) | Q _N at 480 V | Capacitor Ref. | 5.7% fr = 250Hz | | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =36kA) Ref. |
| | | | D R Ref. | D R Ref. | | |
| 12.5 | 17.3 | BLRCH144A173B48 × 1 | LVR05125B40T × 1 | LVR07125B40T × 1 | LC1D18 × 1 | LV429636 × 1 |
| 25 | 34.6 | BLRCH288A346B48 × 1 | LVR05250B40T × 1 | LVR07250B40T × 1 | LC1D38 × 1 | LV429633 × 1 |
| 50 | 67.9 | BLRCH288A346B48 × 2 | LVR05500B40T × 1 | LVR07500B40T × 1 | LC1D95 × 1 | LV429630 × 1 |
| 100 | 135.8 | BLRCH288A346B48 × 4 | LVR05X00B40T × 1 | LVR07X00B40T × 1 | LC1F180 × 1 | LV431631 × 1 |



VarPlusCan02copyeps



| Network 400 V, 60 Hz Capacitor Voltage 480 V 14 % Detuned Filter | | | | | | |
|--|-------------------------|---------------------|------------------|----------|---------------------------|--|
| Effective Power (kvar) | Q _N at 480 V | Capacitor Ref. | 14% fr = 160Hz | | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =36kA) Ref. |
| | | | D R Ref. | D R Ref. | | |
| 12.5 | 16.3 | BLRCH136A163B48 × 1 | LVR14125B40T × 1 | | LC1D18 × 1 | LV429636 × 1 |
| 25 | 31 | BLRCH258A310B48 × 1 | LVR14250B40T × 1 | | LC1D38 × 1 | LV429633 × 1 |
| 50 | 62 | BLRCH258A310B48 × 2 | LVR14500B40T × 1 | | LC1D95 × 1 | LV429630 × 1 |
| 100 | 124 | BLRCH258A310B48 × 4 | LVR14X00B40T × 1 | | LC1F185 × 1 | LV431631 × 1 |



2g_PEB107801_eps



| Network 480 V, 60 Hz Capacitor Voltage 575 V 5.7 % Detuned Filter | | | | | | |
|---|-------------------------|---------------------|------------------|----------|---------------------------|--|
| Effective Power (kvar) | Q _N at 575 V | Capacitor Ref. | 5.7% fr = 250Hz | | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =36kA) Ref. |
| | | | D R Ref. | D R Ref. | | |
| 12.5 | 18 | BLRCH150A180B57 × 1 | LVR05125B48T × 1 | | LC1D12 × 1 | LV429636 × 1 |
| 25 | 35 | BLRCH292A350B57 × 1 | LVR05250B48T × 1 | | LC1D32 × 1 | LV429633 × 1 |
| 50 | 70 | BLRCH292A350B57 × 2 | LVR05500B48T × 1 | | LC1D65 × 1 | LV429630 × 1 |
| 100 | 140 | BLRCH292A350B57 × 4 | LVR05X00B48T × 1 | | LC1F185 × 1 | LV431631 × 1 |




PEB110417_eps



| Network 600 V, 60 Hz Capacitor Voltage 690 V 5.7 % Detuned Filter | | | | | | |
|---|-------------------------|---------------------|------------------|--------|---------------------------|--|
| Effective Power (kvar) | Q _N at 690 V | Capacitor Ref. | 5.7% fr = 250Hz | | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =36kA) Ref. |
| | | | R Ref. | R Ref. | | |
| 12.5 | 16.5 | BLRCH138A165B69 × 1 | LVR05125B60T × 1 | | LC1D12 × 1 | LV429636 × 1 |
| 25 | 33.1 | BLRCH276A331B69 × 1 | LVR05250B60T × 1 | | LC1D25 × 1 | LV429634 × 1 |
| 50 | 66.2 | BLRCH276A331B69 × 2 | LVR05500B60T × 1 | | LC1D50 × 1 | LV429631 × 1 |
| 100 | 132.4 | BLRCH276A331B69 × 4 | LVR05X00B60T × 1 | | LC1F185 × 1 | LV430630 × 1 |

Can type capacitors mechanical characteristics

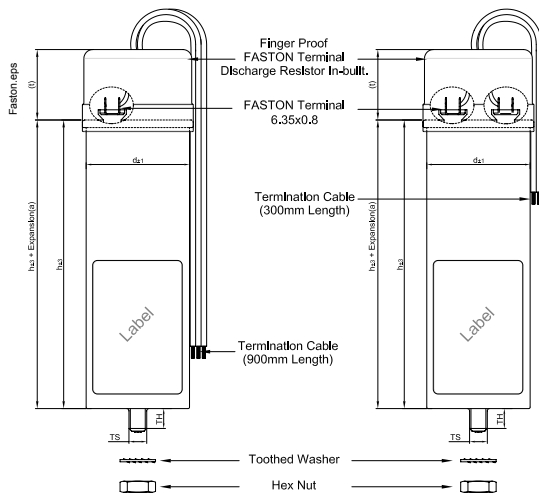

Three Phase
Case Code:
DC, EC, FC,
HC & LC.

Single Phase
Case Codes:
ECM, GCM,
KCM & LCM

Case Code: DC, HC, LC, ECM, GCM, KCM

| | |
|-------------------|------------|
| Creepage distance | min. 16 mm |
| Clearance | min. 16 mm |
| Expansion (a) | max. 10 mm |

Mounting details (for M10/M12 mounting stud)

| | |
|---------------------------|---------------------------|
| Torque | M10: 7 N.m M12: 10 N.m |
| Toothed washer | M10/M12 |
| Hex nut | M10/M12 |
| Terminal assembly Ht. (t) | 50 mm |

| Size (d) | TS | TH |
|----------|-----|-------|
| Ø 50 | M10 | 10 mm |
| Ø 63 | M12 | 13 mm |
| Ø 70 | M12 | 16 mm |

| Case code | Diameter d (mm) | Height h (mm) | Height h + t (mm) | Weight (kg) |
|-----------|-----------------|---------------|-------------------|-------------|
| DC | 50 | 195 | 245 | 0.7 |
| EC/ECM | 63 | 90 | 140 | 0.5 |
| FC | 63 | 115 | 165 | 0.5 |
| HC | 63 | 195 | 245 | 0.9 |
| GCM | 63 | 140 | 190 | 0.6 |
| KCM | 70 | 140 | 190 | 0.6 |
| LC/LCM | 70 | 195 | 245 | 1.1 |


Case Code: MC, NC, RC, RCM & SC

| | |
|-------------------|------------|
| Creepage distance | min. 13 mm |
| Clearance | min. 13 mm |
| Expansion (a) | max. 12 mm |

Mounting details (for M12 mounting stud)


| | |
|---------------------------|----------------|
| Torque | T = 10 Nm |
| Toothed washer | J12.5 DIN 6797 |
| Hex nut | BM12 DIN 439 |
| Terminal screw | M5 |
| Terminal assembly Ht. (t) | 30 mm |

| Case code | Diameter d (mm) | Height h (mm) | Height h + t (mm) | Weight (kg) |
|-----------|-----------------|---------------|-------------------|-------------|
| MC | 75 | 203 | 233 | 1.2 |
| NC | 75 | 278 | 308 | 1.2 |
| RC/RCM | 90 | 212 | 242 | 1.6 |
| SC | 90 | 278 | 308 | 2.3 |

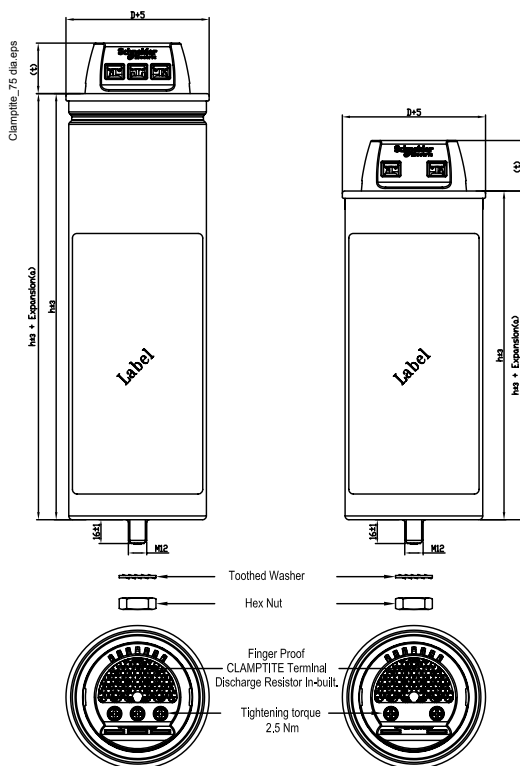

Three Phase
Case Code:
MC, NC, RC & SC

Single phase
case code:
RCM

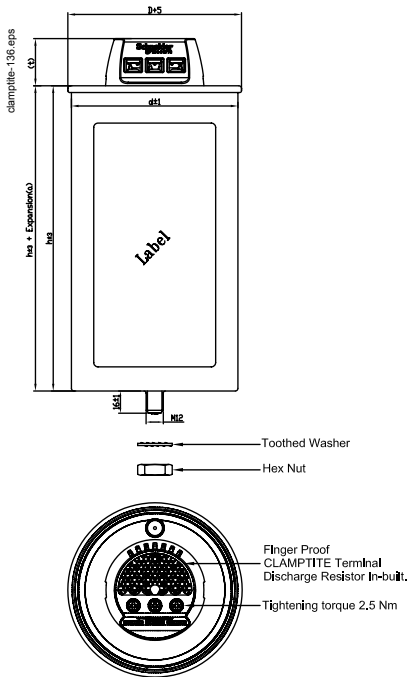

Three Phase
Case Code:
TC, UC & VC

Case Code: TC, UC & VC

| | |
|-------------------|------------|
| Creepage distance | min. 13 mm |
| Clearance | min. 13 mm |
| Expansion (a) | max. 12 mm |

Mounting details (for M12 mounting stud)

| | |
|---------------------------|----------------|
| Torque | T = 10 Nm |
| Toothed washer | J12.5 DIN 6797 |
| Hex nut | BM12 DIN 439 |
| Terminal screw | M5 |
| Terminal assembly Ht. (t) | 30 mm |

| Case code | Diameter d (mm) | Height h (mm) | Height h + t (mm) | Weight (kg) |
|-----------|-----------------|---------------|-------------------|-------------|
| TC | 116 | 212 | 242 | 2.5 |
| UC | 116 | 278 | 308 | 3.5 |
| VC | 136 | 212 | 242 | 3.2 |


Case Code: XC & YC

| | |
|-------------------|------------|
| Creepage distance | min. 13 mm |
| Clearance | 34 mm |
| Expansion (a) | max. 17 mm |

Mounting details (for M12 mounting stud)

| | |
|---------------------------|----------------|
| Torque | T = 10 Nm |
| Toothed washer | J12.5 DIN 6797 |
| Hex nut | BM12 DIN 439 |
| Terminal screw | M10 |
| Terminal assembly Ht. (t) | 43 mm |

| Case code | Diameter d (mm) | Height h (mm) | Height h + t (mm) | Weight (kg) |
|-----------|-----------------|---------------|-------------------|-------------|
| TCM | 116 | 212 | 255 | 3.5 |
| VCM | 136 | 212 | 255 | 4.0 |
| XC | 116 | 278 | 321 | 4.1 |
| YC | 136 | 278 | 321 | 5.3 |

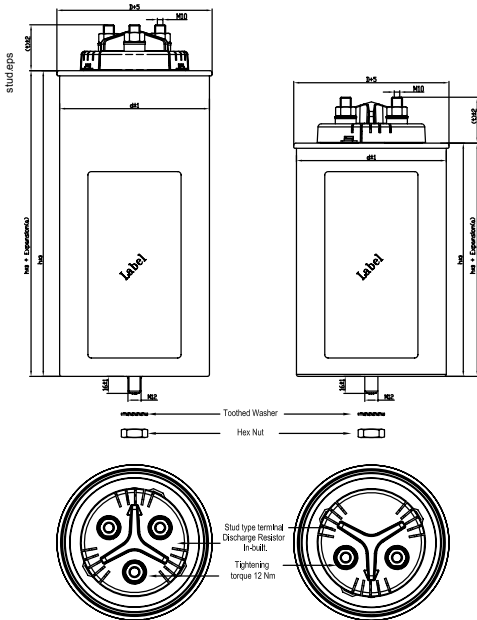

Three Phase
Case Code:
XC & YC

Single Phase
Case Code:
TCM & VCM

A robust, safe, reliable and high-performance solution for power factor correction in standard operating conditions.

PE90137



VarPlus Box

Operating conditions

- Optimum solution for stand alone PF compensation
- For networks with significant non-linear loads (NLL $\leq 20\%$).
- Standard operating temperature up to 55 °C.
- Significant number of switching operations up to 7,000/year.
- Long life expectancy up to 130,000 hours.

VarPlus Box – Answer for high performance with robustness

Robustness

- Double metallic protection.
- Mechanically well suited for “stand-alone” installations.

Safety

- Its unique safety feature electrically disconnects the capacitors safely at the end of their useful life.
- The disconnectors are installed on each phase, which makes the capacitors very safe, in addition to the protective steel enclosure.
- Use of Aluminum inside the steel enclosure eliminates the risk of any fire hazards unlike with plastic cells.

High performance

- Heavy edge metallization/wave-cut edge to ensure high inrush current capabilities and high current handling.
- Special resistivity and profile metallization for better self-healing & enhanced life.

Technology

Constructed internally with single-phase capacitor elements.

The design is specially adapted for mechanical stability. The enclosures of the units are designed to ensure that the capacitors operate reliably in hot and humid tropical conditions, without the need of any additional ventilation louvres (see technical specifications).

Special attention is paid to equalization of temperatures within the capacitor enclosures since this gives better overall performance.

Benefits

- Robustness with double metal protection (Aluminum cans inside steel box)
- Suitable for individual compensation with stand alone installation.
- Direct connection to a machine, in harsh environmental conditions.
- Dual safety
- Pressure Sensitive Disconnect(PSD) in aluminum cans with metal enclosure

Technical specifications

General characteristics

| | | |
|-----------------------|--------------------------------------|--|
| Standards | IEC 60831-1/2 | |
| Voltage range | 400 to 830 V | |
| Frequency | 50 / 60 Hz | |
| Power range | 5 to 60 kvar | |
| Losses (dielectric) | < 0.2W/kvar | |
| Losses (total) | < 0.5W/kvar | |
| Capacitance tolerance | -5%, +10% | |
| Voltage test | Between terminals | 2.15 x U _N (AC), 10 s |
| | Between terminal & container | ≤ 525 V: 3 kV (AC), 10 s or 3.66 kV (AC), 2 s > 525 V: 3.66 kV (AC), 10 s or 4.4 kV (AC), 2 s |
| | Impulse voltage | ≤ 690 V: 8 kV > 690 V: 12 kV |
| Discharge resistor | Fitted, standard discharge time 60 s | |

Working conditions

| | |
|-----------------------------|---|
| Ambient temperature | -25 / 55 °C (Class D) |
| Humidity | 95 % |
| Altitude | 2,000 m above sea level |
| Overvoltage | 1.1 x U _N 8h in every 24 h |
| Overcurrent | Up to 1.8 x I _N |
| Peak inrush current | 250 x I _N |
| Switching operations (max.) | Up to 7,000 switching operations per year |
| Mean Life expectancy | Up to 130,000 hrs |
| Harmonic content withstand | N _{LL} ≤ 20 % |

Installation characteristics

| | |
|-------------------|--|
| Mounting position | Indoor, upright |
| Fastening | Mounting cleats |
| Earthing | |
| Terminals | Bushing terminals designed for large cable termination |

Safety features

| | |
|------------|--|
| Safety | Self-healing + Pressure-sensitive disconnecter for each phase + Discharge device |
| Protection | IP20 |

Construction

| | |
|--------------|--|
| Casing | Sheet steel enclosure |
| Dielectric | Metallized polypropylene film with Zn/Al alloy, special resistivity & profile. Special edge (wave-cut) |
| Impregnation | Non-PCB, polyurethane sticky resin. |

⚠ WARNING

HAZARD OF ELECTRICAL SHOCK

Wait 5 minutes after isolating supply before handling



Failure to follow these instructions can result in injury or equipment damage

| Rated Voltage 380/400/415 V | | | | | | | | | | |
|-----------------------------|-------|-------|--------------------|-----------------------|-------|-------|--------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) | Q _N (kvar) | | | I _N (A) | | | |
| 380 V | 400 V | 415 V | at 400 V | 380 V | 400 V | 415 V | at 400 V | | | |
| 13.6 | 15.1 | 16.3 | 21.8 | 16.3 | 18.1 | 19.5 | 26.1 | 100.1 | GB | BLRBH151A181B40 |
| 18.1 | 20.1 | 21.6 | 29.0 | 21.8 | 24.1 | 25.9 | 34.8 | 133.2 | GB | BLRBH201A241B40 |
| 18.8 | 20.8 | 22.4 | 30.0 | 22.6 | 25.0 | 26.9 | 36.1 | 137.9 | GB | BLRBH208A250B40 |
| 22.6 | 25.0 | 26.9 | 36.1 | 27.1 | 30.0 | 32.3 | 43.3 | 165.7 | GB | BLRBH250A300B40 |
| 37.6 | 41.7 | 44.9 | 60.2 | 45.1 | 50.0 | 53.8 | 72.2 | 276.4 | IB | BLRBH417A500B40 |
| 45.1 | 50.0 | 53.8 | 72.2 | --- | --- | --- | --- | 331.4 | IB | BLRBH500A000B40 |

| Rated Voltage 480 V | | | | | | | | | | |
|-----------------------|-------|-------|--------------------|-----------------------|-------|-------|--------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) | Q _N (kvar) | | | I _N (A) | | | |
| 400 V | 415 V | 480 V | at 480 V | 400 V | 440 V | 480 V | at 480 V | | | |
| 10.8 | 11.7 | 15.6 | 18.8 | 13.0 | 15.7 | 18.7 | 22.5 | 71.8 | GB | BLRBH156A187B48 |
| 11.9 | 12.8 | 17.1 | 20.6 | 14.3 | 17.2 | 20.5 | 24.7 | 78.7 | GB | BLRBH171A205B48 |
| 14.4 | 15.5 | 20.8 | 25.0 | 17.3 | 21.0 | 25.0 | 30.0 | 95.7 | GB | BLRBH208A250B48 |
| 17.9 | 19.3 | 25.8 | 31.0 | 21.5 | 26.0 | 31.0 | 37.2 | 118.8 | IB | BLRBH258A310B48 |
| 20.0 | 21.5 | 28.8 | 34.6 | 24.0 | 29.0 | 34.6 | 41.6 | 132.6 | IB | BLRBH288A346B48 |
| 21.9 | 23.5 | 31.5 | 37.9 | 26.3 | 31.8 | 37.8 | 45.5 | 145.0 | IB | BLRBH315A378B48 |
| 23.5 | 25.3 | 33.9 | 40.8 | 28.3 | 34.2 | 40.7 | 48.9 | 156.1 | IB | BLRBH339A407B48 |
| 29.0 | 31.2 | 41.7 | 50.2 | 34.8 | 42.0 | 50.0 | 60.2 | 192.0 | IB | BLRBH417A500B48 |
| 43.0 | 46.3 | 61.9 | 74.5 | --- | --- | --- | --- | 284.9 | IB | BLRBH619A000B48 |

| Rated Voltage 525 V | | | | | | | | | | |
|-----------------------|-------|-------|--------------------|-----------------------|-------|-------|--------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) | Q _N (kvar) | | | I _N (A) | | | |
| 415 V | 480 V | 525 V | at 525 V | 400 V | 480 V | 525 V | at 525 V | | | |
| 15.6 | 20.9 | 25.0 | 27.5 | 17.4 | 25.1 | 30.0 | 33.0 | 96.2 | GB | BLRBH250A300B52 |
| 25.0 | 33.4 | 40.0 | 44.0 | 27.9 | 40.1 | 48.0 | 52.8 | 153.9 | IB | BLRBH400A480B52 |

| Rated Voltage 600 V | | | | | | | | | | |
|-----------------------|-------|-------|--------------------|-----------------------|-------|-------|--------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) | Q _N (kvar) | | | I _N (A) | | | |
| 480 V | 550 V | 600 V | at 600 V | 480 V | 550 V | 600 V | at 600 V | | | |
| 10.7 | 14.0 | 16.7 | 16.1 | 12.8 | 16.8 | 20.0 | 19.3 | 49.2 | GB | BLRBH167A200B60 |
| 13.3 | 17.5 | 20.8 | 20.0 | 16.0 | 21.0 | 25.0 | 24.0 | 61.3 | GB | BLRBH208A250B60 |

| Rated Voltage 690 V | | | | | | | | | | |
|-----------------------|-------|-------|--------------------|-----------------------|-------|-------|--------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) | Q _N (kvar) | | | I _N (A) | | | |
| 480 V | 600 V | 690 V | at 690 V | 480 V | 600 V | 690 V | at 690 V | | | |
| 7.3 | 11.3 | 15.0 | 12.6 | 8.7 | 13.6 | 18.0 | 15.1 | 33.4 | GB | BLRBH151A181B69 |
| 9.7 | 15.1 | 20.0 | 16.7 | 11.6 | 18.1 | 24.0 | 20.1 | 44.6 | GB | BLRBH200A240B69 |
| 13.3 | 20.9 | 27.6 | 23.1 | 16.0 | 25.0 | 33.1 | 27.7 | 61.4 | GB | BLRBH276A331B69 |

| Rated Voltage 830 V | | | | | | | | | | |
|-----------------------|-------|-------|--------------------|-----------------------|-------|-------|--------------------|---------|-----------|------------------|
| 50 Hz | | | | 60 Hz | | | | μF (X3) | Case Code | Reference Number |
| Q _N (kvar) | | | I _N (A) | Q _N (kvar) | | | I _N (A) | | | |
| 600 V | 690 V | 830 V | at 830 V | 600 V | 690 V | 830 V | at 830 V | | | |
| 17.8 | 23.6 | 34.1 | 23.7 | 21.4 | 28.3 | 40.9 | 28.5 | 52.5 | GB | BLRBH341A409B83 |

VarPlus Box harmonic applications

VarPlus Box capacitors are designed for applications where higher number of non-linear loads are present. Higher current carrying capacity in VarPlus Box allows the operations in stringent conditions. VarPlus Box capacitors are dedicated for standalone applications.

Operating conditions

- For networks with a large number of non-linear loads ($N_{LL} < 50\%$).
- Significant voltage disturbances.
- Very frequent switching operations, up to 7,000/year.

Rated voltage

In a detuned filter application, the voltage across the capacitors is higher than the network service voltage (U_s). Then, capacitors must be designed to withstand higher voltages.

Depending on the selected tuning frequency, part of the harmonic currents is absorbed by the detuned capacitor bank. Then, capacitors must be designed to withstand higher currents, combining fundamental and harmonic currents.

The rated voltage of VarPlus Box capacitors is given in the table below, for different values of network service voltage and relative impedance.



Detuned reactor + VarPlus Box

| Capacitor Rated Voltage U_N (V) | | Network Service Voltage U_s (V) | | | | |
|-----------------------------------|-----|-----------------------------------|-----|-------|-----|-----|
| | | 50 Hz | | 60 Hz | | |
| | | 400 | 690 | 400 | 480 | 600 |
| Relative Impedance (%) | 5.7 | 480 | 830 | 480 | 575 | 690 |
| | 7 | 480 | - | 480 | - | - |
| | 14 | 480 | - | 480 | - | - |

In the following pages, the effective power (kvar) given in the tables is the reactive power provided by the combination of capacitors and reactors.

VarPlus Box + Detuned Reactor + Contactor + MCCB

PE90154_L28_r_eps



| Network 400 V, 50 Hz Capacitor Voltage 480 V 5.7 % / 7 % Detuned Reactor | | | | | | |
|--|-------------------------|---------------------|------------------|------------------|---------------------------|--|
| Effective Power (kvar) | Q _N at 480 V | Capacitor Ref. | 5.7% fr = 215Hz | 7% fr = 190Hz | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =50kA) Ref. |
| | | | D R Ref. | D. R Ref. | | |
| 12.5 | 17.1 | BLRBH171A205B48 × 1 | LVR05125A40T × 1 | LVR07125A40T × 1 | LC1D18 × 1 | LV429846 × 1 |
| 25 | 33.9 | BLRBH339A407B48 × 1 | LVR05250A40T × 1 | LVR07250A40T × 1 | LC1D32 × 1 | LV429843 × 1 |
| 50 | 67.9 | BLRBH339A407B48 × 2 | LVR05500A40T × 1 | LVR07500A40T × 1 | LC1D80 × 1 | LV429840 × 1 |
| 100 | 136.2 | BLRBH339A407B48 × 4 | LVR05X00A40T × 1 | LVR07X00A40T × 1 | LC1D150 × 1 | LV431831 × 1 |



PE90134_L28_r_eps



| Network 400 V, 50 Hz Capacitor Voltage 480 V 14 % Detuned Reactor | | | | | | |
|---|-------------------------|---------------------|------------------|-----------|---------------------------|--|
| Effective Power (kvar) | Q _N at 480 V | Capacitor Ref. | 14% fr = 135Hz | | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =50kA) Ref. |
| | | | D R Ref. | D. R Ref. | | |
| 12.5 | 15.6 | BLRBH156A187B48 × 1 | LVR14125A40T × 1 | | LC1D18 × 1 | LV429846 × 1 |
| 25 | 31.5 | BLRBH315A378B48 × 1 | LVR14250A40T × 1 | | LC1D32 × 1 | LV429844 × 1 |
| 50 | 61.9 | BLRBH619A000B48 × 1 | LVR14500A40T × 1 | | LC1D80 × 1 | LV429841 × 1 |
| 100 | 123.8 | BLRBH619A000B48 × 2 | LVR14X00A40T × 1 | | LC1D150 × 1 | LV430840 × 1 |



PE90158_L20_r_copy/eps



| Network 690 V, 50 Hz Capacitor Voltage 830 V 5.7 % / 7 % Filter | | | | | | |
|---|-------------------------|---------------------|------------------|------------------|---------------------------|---|
| Effective Power (kvar) | Q _N at 830 V | Capacitor Ref. | 5.7% fr = 215Hz | 7% fr = 190Hz | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =50kA) |
| | | | D R Ref. | D. R Ref. | | |
| 25 | 34.1 | BLRBH341A409B83 × 1 | LVR05250A69T × 1 | LVR07250A69T × 1 | LC1D25 × 1 | LV429845 × 1 |
| 50 | 68.2 | BLRBH341A409B83 × 2 | LVR05500A69T × 1 | LVR07500A69T × 1 | LC1D50 × 1 | LV429842 × 1 |
| 100 | 136.4 | BLRBH341A409B83 × 4 | LVR05X00A69T × 1 | LVR07X00A69T × 1 | LC1D80 × 1 | LV430841 × 1 |



PB110417_eps



| Network 400 V, 60 Hz Capacitor Voltage 480 V 5.7 % / 7 % Detuned Reactor | | | | | | |
|--|-------------------------|---------------------|------------------|------------------|---------------------------|--|
| Effective Power (kvar) | Q _N at 480 V | Capacitor Ref. | 5.7% fr = 250Hz | 7% fr = 230Hz | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =50kA) Ref. |
| | | | D R Ref. | D. R Ref. | | |
| 25 | 34.6 | BLRBH288A346B48 × 1 | LVR05250B40T × 1 | LVR07250B40T × 1 | LC1D32 × 1 | LV429843 × 1 |
| 50 | 69.2 | BLRBH288A346B48 × 2 | LVR05500B40T × 1 | LVR07500B40T × 1 | LC1D80 × 1 | LV429840 × 1 |
| 100 | 138.4 | BLRBH288A346B48 × 4 | LVR05X00B40T × 1 | LVR07X00B40T × 1 | LC1D150 × 1 | LV431831 × 1 |

| Network 400 V, 60 Hz Capacitor Voltage 480 V 14 % Detuned Reactor | | | | | | |
|---|-------------------------|---------------------|------------------|-----------|---------------------------|--|
| Effective Power (kvar) | Q _N at 480 V | Capacitor Ref. | 14% fr = 160Hz | | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =50kA) Ref. |
| | | | D R Ref. | D. R Ref. | | |
| 25 | 31 | BLRBH258A310B48 × 1 | LVR14250B40T × 1 | | LC1D25 × 1 | LV429844 × 1 |
| 50 | 62 | BLRBH258A310B48 × 2 | LVR14500B40T × 1 | | LC1D50 × 1 | LV429841 × 1 |
| 100 | 124 | BLRBH258A310B48 × 4 | LVR14X00B40T × 1 | | LC1D150 × 1 | LV430840 × 1 |

| Network 600 V, 60 Hz Capacitor Voltage 690 V 5.7 % Detuned Reactor | | | | | | |
|--|-------------------------|---------------------|------------------|-----------|---------------------------|--|
| Effective Power (kvar) | Q _N at 690 V | Capacitor Ref. | 5.7% fr = 250Hz | | Switching: Contactor Ref. | Protection: Compact NSX (I _{cu} =50kA) Ref. |
| | | | D R Ref. | D. R Ref. | | |
| 25 | 33.1 | BLRBH276A331B69 × 1 | LVR05250B60T × 1 | | LC1D25 × 1 | LV429845 × 1 |
| 50 | 66.2 | BLRBH276A331B69 × 2 | LVR05500B60T × 1 | | LC1D50 × 1 | LV429842 × 1 |
| 100 | 132.4 | BLRBH276A331B69 × 4 | LVR05X00B60T × 1 | | LC1D115 × 1 | LV430841 × 1 |

Box type capacitor


Mechanical characteristics

Case Code: DB, EB, FB, GB & HB

| | |
|--------------------------|--------------|
| Creepage distance | 30 mm |
| Clearance | |
| Phase to phase | 25 mm (min.) |
| Phase to earth | 19 mm (min.) |

Mounting details: mounting screw M6, 2 Nos.

| Case code | W1 (mm) | W2 (mm) | W3 (mm) | H (mm) | D (mm) | Weight (kg) |
|-----------|---------|---------|---------|--------|--------|-------------|
| DB | 263 | 243 | 213 | 355 | 97 | 4.8 |
| EB | 263 | 243 | 213 | 260 | 97 | 3.6 |
| FB | 309 | 289 | 259 | 355 | 97 | 5.4 |
| GB | 309 | 289 | 259 | 355 | 153 | 7.5 |
| HB | 309 | 289 | 259 | 455 | 153 | 8.0 |

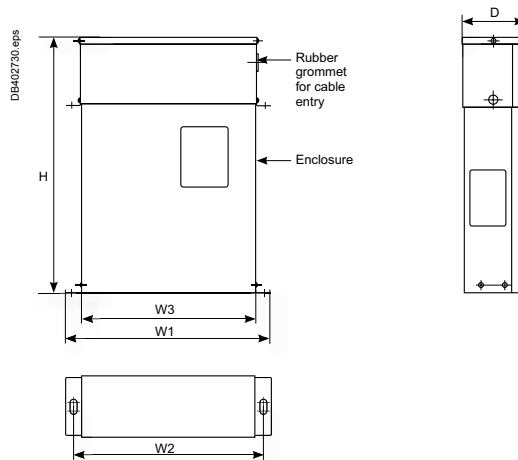


Case Code: IB

| | |
|--------------------------|--------------|
| Creepage distance | 30 mm |
| Clearance | |
| Phase to phase | 25 mm (min.) |
| Phase to earth | 19 mm (min.) |

Mounting details: mounting screw M6, 2 Nos.

| Case code | W1 (mm) | W2 (mm) | W3 (mm) | H (mm) | D (mm) | Weight (kg) |
|-----------|---------|---------|---------|--------|--------|-------------|
| IB | 309 | 289 | 259 | 497 | 224 | 10.0 |

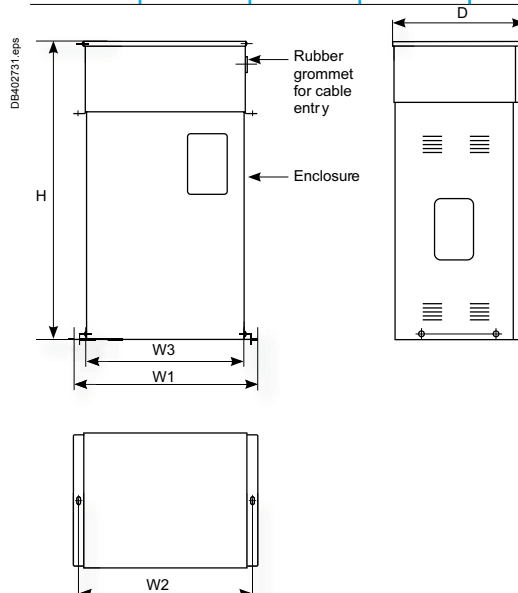

| | |
|--|-----------|
| <i>Presentation</i> | 3 |
| <i>Power Factor Correction guideline</i> | 15 |
| <i>Low Voltage capacitors</i> | |
| VarPlus DR | 44 |
| <i>Power Factor controllers</i> | 49 |
| <i>Contactors</i> | 57 |
| <i>Appendix</i> | 61 |

VarPlus DR

3 Phase Detuned reactors

The detuned reactors (DR) are designed to protect the capacitors by preventing amplification of the harmonics present on the network.

PE90154_6p65



Operating conditions

- Use: indoor.
- Storage temperature: -40 °C, +60 °C.
- Relative humidity in operation: 20-80 % .
- Salt spray withstand: 250 hours (for 400 V - 50 Hz range).
- Operating temperature:
 - altitude: ≤ 1000 m: Min = 0 °C, Max = 55 °C, highest average over 1 year = 40 °C, 24 hours = 50 °C.
 - altitude: ≤ 2000 m: Min = 0 °C, Max = 50°C, highest average over 1 year = 35 °C, 24 hours = 45°C.

Installation guidelines

- Forced ventilation required.
- Vertical detuned reactor winding for better heat dissipation.

As the detuned reactor is provided with thermal protection, the normally closed dry contact must be used to disconnect the step in the event of overheating.

Technical specifications

| General characteristics | |
|---|---|
| Description | Three-phase, dry, magnetic circuit, impregnated |
| Degree of protection | IP00 |
| Insulation class | H |
| Rated voltage | 400 to 690 V - 50 Hz 400 to 600 V - 60 Hz Other voltages on request |
| Inductance tolerance per phase | -5, +5% |
| Insulation level | 1.1 kV |
| Continuous overload factor on fundamental current for reactor design | 10% |
| Saturation current | 1.8 x I ₁ |
| Dielectric test 50/60 Hz between windings and windings/earth | 4 kV, 1 min |
| Thermal protection | Restored on terminal block 250 V AC, 2 A |

Let's define the fundamental current I₁(A) as the current absorbed by the capacitor and detuned reactor assembly, when a purely sinusoidal voltage is applied, equal to the network service voltage U_S(V).
 $I_1 = Q \text{ (kvar)} / (\sqrt{3} \times U_S)$

In order to operate safely in real conditions, a detuned reactor must be designed to accept a maximum permanent current (I_{MP}) taking account of harmonic currents and voltage fluctuations.


The following table gives the typical percentage of harmonic currents considered for the different tuning orders.

| (%) | Harmonic currents | | | |
|-----------------------------------|-------------------|----------------|----------------|-----------------|
| Tuning order / Relative Impedance | i ₃ | i ₅ | i ₇ | i ₁₁ |
| 2.7 / 14% | 5 | 15 | 5 | 2 |
| 3.8 / 7% | 3 | 40 | 12 | 5 |
| 4.2 / 5.7% | 2 | 63 | 17 | 5 |

Detuned reactor has to be protected from over currents with MCCB. A 1.1 factor is applied in order to allow long-term operation at a supply voltage up to (1.1 x U_S).
 $I_{MP} = 1.1 \times I_1 + I_3 + I_5 + I_7 + I_{11}$

The maximum permanent current (I_{MP}) is given in the following table for different tuning orders:

| Tuning order | I _{MP} (times I _S) |
|--------------|---|
| 2.7 / 14% | 1.12 |
| 3.8 / 7% | 1.2 |
| 4.2 / 5.7% | 1.3 |

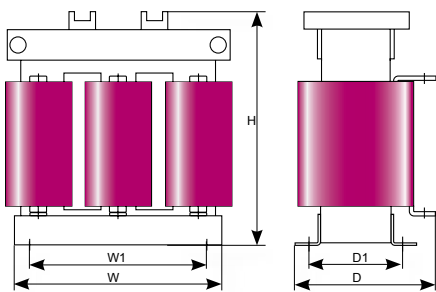

For dimensions and more details, please consult us.

| Network voltage 400 V, 50 Hz | | | | | | | | | | | | | |
|------------------------------|------|-----------------|--------------|-------------------------|----------------------------|---|--------|---------|--------|---------|--------|-------------|------------------|
| 50 Hz | | | | | | | | | | | | | |
| Relative Impedance (%) | kvar | Inductance (mH) | I_{MP} (A) | Max losses at I_1 (W) | Max losses at I_{MP} (W) | Max losses at I_{MP} (W) with full spectrum | W (mm) | W1 (mm) | D (mm) | D1 (mm) | H (mm) | Weight (kg) | Reference Number |
| 5.70% (4.2) | 6.5 | 4.727 | 12 | 50 | 65 | 100 | 240 | 200 | 160 | 125 | 220 | 9 | LVR05065A40T |
| | 12.5 | 2.445 | 24 | 80 | 100 | 150 | 240 | 200 | 160 | 125 | 220 | 13 | LVR05125A40T |
| | 25 | 1.227 | 47 | 90 | 115 | 200 | 240 | 200 | 160 | 125 | 220 | 18 | LVR05250A40T |
| | 50 | 0.614 | 95 | 130 | 215 | 320 | 260 | 200 | 200 | 125 | 270 | 24 | LVR05500A40T |
| 7% (3.8) | 100 | 0.307 | 190 | 200 | 345 | 480 | 350 | 200 | 220 | 125 | 350 | 46 | LVR05X00A40T |
| | 6.5 | 5.775 | 11 | 40 | 55 | 100 | 240 | 200 | 160 | 125 | 220 | 8 | LVR07065A40T |
| | 12.5 | 2.987 | 22 | 70 | 95 | 150 | 240 | 200 | 160 | 125 | 220 | 10 | LVR07125A40T |
| | 25 | 1.499 | 43 | 100 | 140 | 200 | 240 | 200 | 160 | 125 | 220 | 15 | LVR07250A40T |
| 14% (2.7) | 50 | 0.750 | 86 | 140 | 200 | 320 | 260 | 200 | 200 | 125 | 270 | 22 | LVR07500A40T |
| | 100 | 0.375 | 172 | 260 | 365 | 480 | 350 | 200 | 220 | 125 | 350 | 37 | LVR07X00A40T |
| | 6.5 | 11.439 | 10 | 80 | 95 | 100 | 240 | 200 | 160 | 125 | 220 | 10 | LVR14065A40T |
| | 12.5 | 6.489 | 20 | 110 | 135 | 150 | 240 | 200 | 160 | 125 | 220 | 15 | LVR14125A40T |
| | 25 | 3.195 | 40 | 150 | 185 | 200 | 240 | 200 | 160 | 125 | 220 | 22 | LVR14250A40T |
| | 50 | 1.598 | 80 | 290 | 360 | 400 | 260 | 200 | 200 | 125 | 270 | 33 | LVR14500A40T |
| | 100 | 0.799 | 160 | 450 | 550 | 600 | 350 | 200 | 220 | 125 | 350 | 55 | LVR14X00A40T |

| Network voltage 690 V, 50 Hz | | | | | | | | | | | | | |
|------------------------------|------|-----------------|--------------|-------------------------|----------------------------|---|--------|---------|--------|---------|--------|-------------|------------------|
| 50 Hz | | | | | | | | | | | | | |
| Relative Impedance (%) | kvar | Inductance (mH) | I_{MP} (A) | Max losses at I_1 (W) | Max losses at I_{MP} (W) | Max losses at I_{MP} (W) with full spectrum | W (mm) | W1 (mm) | D (mm) | D1 (mm) | H (mm) | Weight (kg) | Reference Number |
| 5.70% (4.2) | 12.5 | 7.28 | 13.3 | 70 | 110 | 150 | 240 | 200 | 160 | 125 | 220 | 13 | LVR05125A69T |
| | 25 | 3.654 | 27 | 70 | 125 | 200 | 240 | 200 | 160 | 125 | 220 | 18 | LVR05250A69T |
| | 50 | 1.827 | 53 | 120 | 210 | 320 | 260 | 200 | 200 | 125 | 270 | 30 | LVR05500A69T |
| | 100 | 0.913 | 106 | 230 | 395 | 600 | 350 | 200 | 220 | 125 | 350 | 42 | LVR05X00A69T |
| 7% (3.8) | 12.5 | 8.893 | 12 | 70 | 95 | 150 | 240 | 200 | 160 | 125 | 220 | 13 | LVR07125A69T |
| | 25 | 4.464 | 24 | 70 | 100 | 200 | 240 | 200 | 160 | 125 | 220 | 18 | LVR07250A69T |
| | 50 | 2.232 | 47 | 160 | 215 | 320 | 260 | 200 | 200 | 125 | 270 | 22 | LVR07500A69T |
| | 100 | 1.116 | 94 | 260 | 355 | 480 | 350 | 200 | 220 | 125 | 350 | 40 | LVR07X00A69T |

| Network voltage 230 V, 50 Hz | | | | | | | | | | | | | |
|------------------------------|------|-----------------|--------------|-------------------------|----------------------------|---|--------|---------|--------|---------|--------|-------------|------------------|
| 50 Hz | | | | | | | | | | | | | |
| Relative Impedance (%) | kvar | Inductance (mH) | I_{MP} (A) | Max losses at I_1 (W) | Max losses at I_{MP} (W) | Max losses at I_{MP} (W) with full spectrum | W (mm) | W1 (mm) | D (mm) | D1 (mm) | H (mm) | Weight (kg) | Reference Number |
| 5.70% (4.2) | 6.5 | 1.651 | 20 | 40 | 65 | 100 | 240 | 200 | 160 | 125 | 220 | 8 | LVR05065A23T |
| | 12.5 | 0.794 | 42 | 50 | 85 | 150 | 240 | 200 | 160 | 125 | 220 | 13 | LVR05125A23T |
| | 25 | 0.397 | 84 | 80 | 140 | 200 | 240 | 200 | 160 | 125 | 220 | 18 | LVR05250A23T |

Note:

1. Use the Max losses at I_{MP} (W) with full spectrum for sizing the capacitor bank (Panel design & ventilation)
2. The dimensions mentioned above are the maximum limits.

| Network voltage 400 V, 60 Hz | | | | | | | | | | | | | |
|------------------------------|------|-----------------|---------------------|----------------------------------|-----------------------------------|--|--------|---------|--------|---------|--------|-------------|------------------|
| 50 Hz | | | | | | | | | | | | | |
| Relative Impedance (%) | kvar | Inductance (mH) | I _{MP} (A) | Max losses at I ₁ (W) | Max losses at I _{MP} (W) | Max losses at I _{MP} (W) with full spectrum | W (mm) | W1 (mm) | D (mm) | D1 (mm) | H (mm) | Weight (kg) | Reference Number |
| 5.70% (4.2) | 12.5 | 2.005 | 24 | 60 | 105 | 150 | 240 | 200 | 160 | 125 | 220 | 10 | LVR05125B40T |
| | 25 | 1.000 | 48.1 | 60 | 105 | 200 | 240 | 200 | 160 | 125 | 220 | 17 | LVR05250B40T |
| | 50 | 0.500 | 96.3 | 120 | 200 | 320 | 260 | 200 | 200 | 125 | 270 | 22 | LVR05500B40T |
| | 100 | 0.250 | 192.5 | 200 | 350 | 480 | 350 | 200 | 220 | 125 | 350 | 39 | LVR05X00B40T |
| 7% (3.8) | 12.5 | 2.450 | 21.8 | 80 | 115 | 150 | 240 | 200 | 160 | 125 | 220 | 9 | LVR07125B40T |
| | 25 | 1.221 | 43.8 | 90 | 130 | 200 | 240 | 200 | 160 | 125 | 220 | 15 | LVR07250B40T |
| | 50 | 0.611 | 87.6 | 150 | 200 | 320 | 260 | 200 | 200 | 125 | 270 | 22 | LVR07500B40T |
| | 100 | 0.305 | 175.3 | 240 | 330 | 480 | 350 | 200 | 220 | 125 | 350 | 35 | LVR07X00B40T |
| 14% (2.7) | 12.5 | 5.139 | 21 | 110 | 135 | 150 | 240 | 200 | 160 | 125 | 220 | 13 | LVR14125B40T |
| | 25 | 2.704 | 39.9 | 140 | 170 | 200 | 240 | 200 | 160 | 125 | 220 | 18 | LVR14250B40T |
| | 50 | 1.352 | 79.8 | 250 | 305 | 400 | 260 | 200 | 200 | 125 | 270 | 33 | LVR14500B40T |
| | 100 | 0.676 | 159.7 | 370 | 460 | 600 | 350 | 200 | 220 | 125 | 350 | 54 | LVR14X00B40T |

| Network voltage 480 V, 60 Hz | | | | | | | | | | | | | |
|------------------------------|-------|-----------------|---------------------|----------------------------------|-----------------------------------|--|--------|---------|--------|---------|--------|--------------|------------------|
| 50 Hz | | | | | | | | | | | | | |
| Relative Impedance (%) | kvar | Inductance (mH) | I _{MP} (A) | Max losses at I ₁ (W) | Max losses at I _{MP} (W) | Max losses at I _{MP} (W) with full spectrum | W (mm) | W1 (mm) | D (mm) | D1 (mm) | H (mm) | Weight (kg) | Reference Number |
| 5.70% (4.2) | 12.5 | 2.764 | 20.9 | 60 | 95 | 150 | 240 | 200 | 160 | 125 | 220 | 13 | LVR05125B48T |
| | 25 | 1.421 | 40.6 | 70 | 120 | 200 | 240 | 200 | 160 | 125 | 220 | 18 | LVR05250B48T |
| | 50 | 0.710 | 81.3 | 120 | 210 | 320 | 260 | 200 | 200 | 125 | 270 | 25 | LVR05500B48T |
| | 75 | 0.474 | 121.9 | 180 | 310 | 480 | 350 | 200 | 220 | 125 | 350 | 35 | LVR05X00B48T |
| | 100 | 0.355 | 162.6 | 210 | 360 | 480 | 350 | 200 | 220 | 125 | 350 | 40 | LVR05X00B48T |
| 150 | 0.237 | 243.9 | 260 | 440 | 600 | 350 | 200 | 220 | 125 | 350 | 50 | LVR05X00B48T | |

| Network voltage 220 V, 60 Hz | | | | | | | | | | | | | |
|------------------------------|------|-----------------|---------------------|----------------------------------|-----------------------------------|--|--------|---------|--------|---------|--------|-------------|------------------|
| 50 Hz | | | | | | | | | | | | | |
| Relative Impedance (%) | kvar | Inductance (mH) | I _{MP} (A) | Max losses at I ₁ (W) | Max losses at I _{MP} (W) | Max losses at I _{MP} (W) with full spectrum | W (mm) | W1 (mm) | D (mm) | D1 (mm) | H (mm) | Weight (kg) | Reference Number |
| 5.70% (4.2) | 12.5 | 0.618 | 42.8 | 50 | 95 | 150 | 240 | 200 | 160 | 125 | 220 | 13 | LVR05125B22T |
| | 25 | 0.309 | 85.6 | 60 | 105 | 200 | 240 | 200 | 160 | 125 | 220 | 18 | LVR05250B22T |
| | 50 | 0.155 | 171.2 | 110 | 190 | 320 | 260 | 200 | 200 | 125 | 270 | 29 | LVR05500B22T |
| | 100 | 0.077 | 342.3 | 220 | 380 | 480 | 350 | 200 | 220 | 125 | 350 | 39 | LVR05X00B22T |

| Network voltage 240 V, 60 Hz | | | | | | | | | | | | | |
|------------------------------|------|-----------------|---------------------|----------------------------------|-----------------------------------|--|--------|---------|--------|---------|--------|-------------|------------------|
| 50 Hz | | | | | | | | | | | | | |
| Relative Impedance (%) | kvar | Inductance (mH) | I _{MP} (A) | Max losses at I ₁ (W) | Max losses at I _{MP} (W) | Max losses at I _{MP} (W) with full spectrum | W (mm) | W1 (mm) | D (mm) | D1 (mm) | H (mm) | Weight (kg) | Reference Number |
| 5.70% (4.2) | 12.5 | 0.665 | 43.4 | 50 | 85 | 150 | 240 | 200 | 160 | 125 | 220 | 13 | LVR05125B24T |
| | 25 | 0.332 | 86.9 | 60 | 110 | 200 | 240 | 200 | 160 | 125 | 220 | 18 | LVR05250B24T |
| | 50 | 0.166 | 173.7 | 150 | 265 | 320 | 260 | 200 | 200 | 125 | 270 | 29 | LVR05500B24T |

| Network voltage 600 V, 60 Hz | | | | | | | | | | | | | |
|------------------------------|------|-----------------|---------------------|----------------------------------|-----------------------------------|--|--------|---------|--------|---------|--------|-------------|------------------|
| 50 Hz | | | | | | | | | | | | | |
| Relative Impedance (%) | kvar | Inductance (mH) | I _{MP} (A) | Max losses at I ₁ (W) | Max losses at I _{MP} (W) | Max losses at I _{MP} (W) with full spectrum | W (mm) | W1 (mm) | D (mm) | D1 (mm) | H (mm) | Weight (kg) | Reference Number |
| 5.70% (4.2) | 12.5 | 4.345 | 16.6 | 60 | 95 | 150 | 240 | 200 | 160 | 125 | 220 | 13 | LVR05125B60T |
| | 25 | 2.165 | 33.3 | 60 | 100 | 200 | 240 | 200 | 160 | 125 | 220 | 18 | LVR05250B60T |
| | 50 | 1.083 | 66.7 | 130 | 220 | 320 | 260 | 200 | 200 | 125 | 270 | 24 | LVR05500B60T |
| | 75 | 0.722 | 100.0 | 180 | 310 | 480 | 350 | 200 | 220 | 125 | 350 | 35 | LVR05750B60T |
| | 100 | 0.541 | 133.3 | 230 | 385 | 480 | 350 | 200 | 220 | 125 | 350 | 40 | LVR05X00B60T |
| | 150 | 0.361 | 200.0 | 280 | 470 | 600 | 350 | 200 | 220 | 125 | 350 | 56 | LVR05X50B60T |



| | |
|--|-----------|
| <i>Presentation</i> | |
| <i>Power Factor Correction guideline</i> | 3 |
| <i>Low Voltage capacitors</i> | 15 |
| <i>Detuned reactors</i> | 43 |
| | |
| Varlogic series | 50 |
| <i>RT6, RT8 and RT12</i> | |
| | |
| VarPlus Logic series | 52 |
| <i>VPL6 and VPL12</i> | |
| | |
| <i>Contactors</i> | 57 |
| <i>Appendix</i> | 61 |

Varlogic series

RT6, RT8 and RT12

The Varlogic controllers permanently monitor the reactive power of the installation and control the connection and disconnection of capacitor steps in order to obtain the targeted power factor.



Varlogic RT6, RT8 and RT12

Performance

- Permanent monitoring of the network and equipment.
- Information provided about equipment status.
- New control algorithm designed to reduce the number of switching operations and quickly attain the targeted power factor.

Simplicity

- Simplified programming and possibility of intelligent self set-up.
- Ergonomic layout of control buttons.
- Quick and simple mounting and wiring.
- A special menu allows controller self-configuration.

User-friendliness

The large display allows:

- Direct viewing of installation electrical information and capacitor stage condition.
- Direct reading of set-up configuration.
- Intuitive browsing in the various menus (indication, commissioning, configuration).
- Alarm indication.

Range

| Type | Number of step output contacts | Part number |
|------|--------------------------------|-------------|
| RT6 | 6 | 51207 |
| RT8 | 8 | 51209 |
| RT12 | 12 | 51213 |

Technical specifications

General characteristics

Protection Index

| | |
|-------------|------|
| Front panel | IP41 |
| Rear | IP20 |
| Shock test | IK06 |

Technical Characteristics

| | |
|--|--|
| Display | 4 digit 7 segment Red LEDs |
| Measuring current | 0 to 5 A |
| Number of steps | 6 (RT6), 8(RT8), 12(RT12) |
| Supply voltage (V AC) 50/60Hz | 320 to 460 V |
| Dimensions | 143 x 143 x 67 mm |
| Mounting | Flush panel mounting |
| Switch board cut-out | 139 x 139 mm |
| Weight | 0.8 Kg |
| Operating temperature | 0°C – 55°C |
| Alarm contact | 1 N/O contact |
| Alarm conditions | The alarm relay will activate for 1. Over voltage 2. Low power factor 3. Over compensation |
| Output contact | 3A/ 250V - 1A/400V |
| Connection | Phase-to-phase |
| CT range | 10000/5 A |
| cosφ Setting range | 0.85 ind. ... 1 |
| Possibility of a dual cosφ target | No |
| Accuracy | ±2 % |
| Micro cut voltage protection | Yes, if less than 30% of nominal voltage condition for more than 20ms controller disconnects the steps |
| Response delay time | 10 to 1800 s |
| Reconnection delay time | 10 to 1800 s |
| 4-quadrant operation for generator application | No, Only suitable for 2-quadrant applications |

Standards

| | |
|--------|--|
| IEC | EMC - IEC 61326 - IEC 61000-6-2, IEC 61000-6-4 |
| Safety | EN 61010-1 |

VarPlus Logic has all what you need for the simple and efficient operation of your automatic power factor correction equipment to maintain your power factor. It is a simple and intelligent relay which measure, monitor and controls the reactive energy. Easy commissioning, step size detection and monitoring makes it different from others in the market.

DB417842 Presentation eps



VarPlus Logic VL6, VL12

Capacitor bank step monitoring

- Monitoring of all the connected capacitor steps.
- Real time power in “kvar” for the connected steps .
- Remaining step capacity per step as a % of the original power since installation.
- Derating since installation.
- Number of switching operations of every connected step.

System Measurement and monitoring

- THD(u) and THD(u) Spectrum 3rd to 19th – Measurement, Display and Alarm.
- Measurement of DQ – “kvar” required to achieve target cos phi.
- Present cabinet temperature and maximum recorded temperature.
- System parameters – Voltage, Current, Active, reactive and apparent power.
- Large LCD display to monitor real step status and other parameters.

Easy Commissioning

- Automatic Initialization and automatic step detection to do a auto commissioning.
- Automatic wiring correction - voltage and current input wiring correction.
- 1A or 5A CT secondary compatible.

Flexibility to the panel builder and retrofitting

- No step sequence restriction like in the traditional relays.
- Any step sequences with auto detect. No programming needed.
- Easy to retrofit the faulty capacitor with different power.
- Quick and simple mounting and wiring.
- Connect to the digitized Schindler solutions through RS485 communication in Modbus protocol.
- Seamless connection to the Schneider software and gateways.

Do more with VarPlus Logic

- Programmable alarms with last 5 alarms log.
- Suitable for medium voltage applications.
- Suitable for 4 quadrant operations.
- Dual cos phi control through digital inputs or export power detection.
- Dedicated alarm and fan control relays.
- Advance expert programming Menu to configure the controller the way you need.
- New control algorithm designed to reduce the number of switching operations and quickly attain the targeted power fact

Alarms

- Faulty Step
- Configurable alarm for step derating
- THDu Limit alarm.
- Temperature alarm
- Self correction by switching off the steps at the event of THDu alarm, temperature alarm and overload limit alarm.
- Under compensation alarm
- Under/Over Voltage Alarm
- Low/High Current Alarm
- Overload limit alarm
- Hunting alarm
- Maximum operational limits - Time and number of switching

Range

| Type | Number of step output contacts | Part number |
|------|--------------------------------|-------------|
| VL6 | 06 | VPL06N |
| VL12 | 12 | VPL12N |

General characteristics

Voltage and current Input

| | |
|---------------------------------|---|
| Direct supply voltage | 90 – 550 V, 1ph, 50/60 Hz |
| | VA Burden: 6 VA |
| | 300 V LN / 519 V LL CAT III or 550 V CAT II |
| Type of input connection | Phase to phase or phase to neutral |
| Protection against voltage dips | Automatic disconnection of steps for dips > 15 ms (protection of capacitor) |
| CT secondary | 1A or 5A compatible |
| CT primary range | Up to 9600 A |
| Current | 15 mA – 6 A, 1PH, VA Burden : < 1 VA |
| Connection terminals | Screw type, pluggable. Section: 0.2 – 2.5 mm ² (0.2 – 1 mm ² for Modbus and digital inputs) |


Power factor settings & algorithm selection

| | |
|---|--|
| Regulation setting - Programmable | From Cos Phi 0.7c to 0.7i |
| Reconnection time -Programmable | From 1 to 6500 s |
| Response time -Programmable | From 1 to 6500 s |
| Possibility of dual cos Phi target | Yes, Through Digital Input or if export power detected |
| Program algorithm | AUTOMATIC (best fit) - Default LIFO PROGRESSIVE |
| Import export application compatibility | 4- Quadrant operation for generator application |


Program intelligence

| | |
|---|---|
| Automatic Initialization and Automatic bank detection | Yes |
| Detection and display of power, number of switching & derating of all connected steps | Yes |
| Capacitor bank step sequence | Any sequence. No restriction/limitation on sequence |


Dimensions

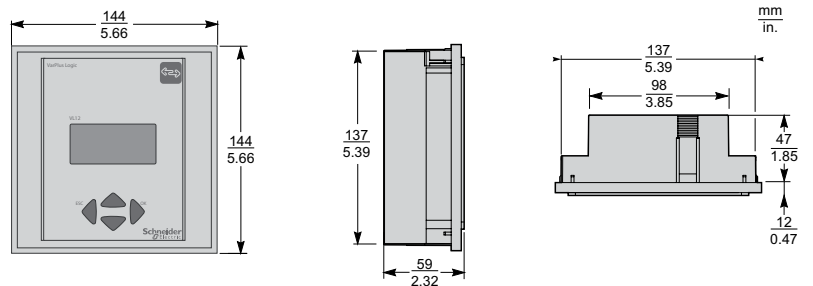


Mounting

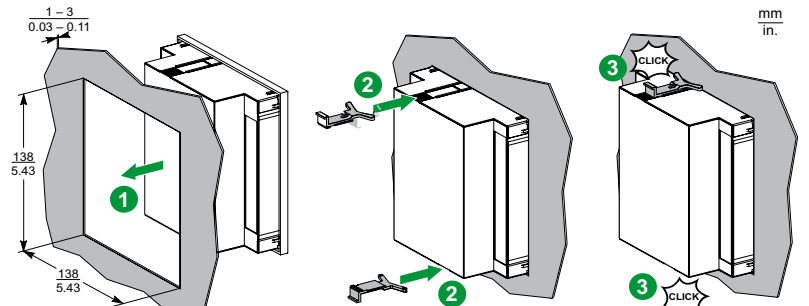

Phase-to-Neutral with VTs (3PH4W)

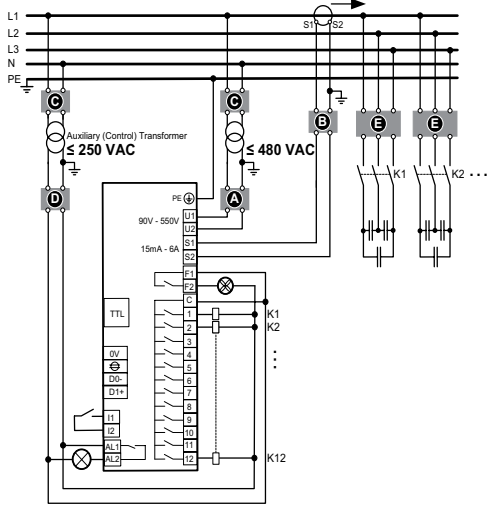

Phase-to-Phase with VTs (3PH3W)

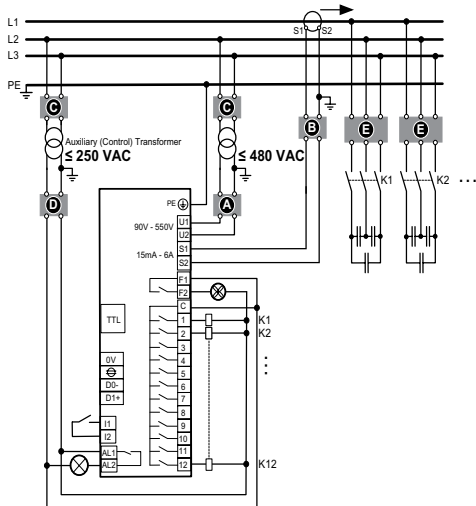

- A** Upstream protection
Voltage input: 2A certified circuit breakers or fuses
- B** Shunting block for CT
- C** VT primary fuses and disconnect switch
- D** Output relays: 10 A (max.) certified circuit breakers or fuses (Applicable for applications with voltage transformers only).
- E** Capacitor primary fuses or CB's

General characteristics

Alarm and control

| | |
|-----------------------------------|--|
| Control outputs (step output) | VL6: 6 relays VL12: 12 relays (NO contact) 250 V LN or LL (CAT III) DC Rating : 48 V DC / 1 A AC Rating : 250 V AC / 5 A Common root: 10 A max. |
| Dedicated fan control relay | Yes. Normal open contact (NO) 48 V DC / 1 A, 250 V AC / 5 A |
| Alarm contact | The relay contact is open when the controller is energized with no alarm and will close in the event of an alarm. The relay is a NC (Normally Close) when the controller is not energized. Rating : 48 V DC / 1 A, 250 V AC / 5 A |
| Digital Input for Cos phi2 target | Dry contact (internal supply 5 V, 10 mA) |
| Modbus RS-485 serial port (RTU) | Line polarization / termination, not included |
| Communication protocol | Modbus |
| Interface TTL | Service port. Only for internal use |
| Internal Temperature probe | Yes |

Display and measurement

| | |
|---|--|
| Display | LCD graphic 56 x 25 (Backlit) |
| Alarms log | 5 last alarms |
| Voltage Harmonic Distortion measurement | THDu ; Individual odd harmonics distortion from H3 to H19 |
| Measurement displayed and accuracy | Voltage, Current & Frequency: ±1 % Energy measurements, Cos Phi, THD(u): ±2 % Individual Voltage harmonics (H3 to H19): ±3 % Temperature measurement : ±3 °C |

Testing standards and conformities

| | |
|------------------------|---|
| Standards | IEC 61010-1 IEC 61000 6-2 IEC 61000 6-4: level B IEC 61326-1 UL 61010 |
| Conformity and listing | Conformity and listing CE, NRTL, c NRTL, EAC |

Mechanical specifications

| | |
|----------------------|--|
| Case | Front: Instrument case plastic RAL 7016 Rear: Metal |
| Degree of Protection | Front: IP41, (IP54 by using a gasket) Rear: IP20 |
| Weight | 0.6 kg |
| Size | 144 x 144 x 58 mm (H x W x D) |
| Panel Cutout | 138 x 138 (+0.5) mm, thickness 1 – 3 mm |
| Panel Mounting | Flush mounting |

Storage condition

| | |
|---------------------------|--|
| Temperature for operation | -20 °C +60 °C |
| Storage | -40 °C +85 °C |
| Humidity | 0 % - 95 %, without condensation for operation and storage |
| Maximum pollution degree | 2 |
| Maximum altitude | ≤ 2000m |



| | |
|--|-----------|
| <i>Presentation</i> | |
| <i>Power Factor Correction guideline</i> | 3 |
| <i>Low Voltage capacitors</i> | 15 |
| <i>Detuned reactors</i> | 43 |
| <i>Power Factor controllers</i> | 49 |
| TeSys Contactors | 58 |
| <i>Appendix</i> | 61 |

TeSys contactors

For switching 3-phase capacitor banks, used for power factor correction
Direct connection without choke inductors

Special contactors LC1 D•K are designed for switching 3-phase, single- or multiple-step capacitor banks. They comply with standards IEC 60070 and 60831, NFC 54-100, VDE 0560, UL and CSA.

Special contactors

Special contactors LC1 D•K are designed for switching 3-phase, single or multiple-step capacitor banks (up to 6 steps). Over 6 steps, it is recommended to use chokes in order to limit the inrush current and thus improve the lifetime of the installation. The contactors are conform to standards IEC 60070 and 60831, UL and CSA.

Contactor applications

Specification

Contactors fitted with a block of early make poles and damping resistors, limiting the value of the current on closing to 60 In max.

This current limitation increases the life of all the components of the installation, in particular that of the fuses and capacitors.

The patented design of the add-on block (n° 90 119-20) ensures safety and long life of the installation.

Operating conditions

There is no need to use choke inductors for either single or multiple-step capacitor banks. Short-circuit protection must be provided by gl type fuses rated at 1.7...2 In.

Maximum operational power

The power values given in the selection table below are for the following operating conditions:

| | | |
|---------------------------------------|-----------------------------|--------------------------------|
| Prospective peak current at switch-on | LC1 D•K | 200 In |
| Maximum operating rate | LC1 DFK, DGK, DLK, DMK, DPK | 240 operating cycles/hour |
| | LC1 DTK, DWK | 100 operating cycles/hour |
| Electrical durability at nominal load | All contactor ratings | 400 V 100 000 operating cycles |
| | | 690 V 100 000 operating cycles |

| Operational power at 50/60 Hz ⁽¹⁾ $\theta \leq 55^\circ\text{C}$ ⁽²⁾ | | | Instantaneous auxiliary contacts | | Tightening torque on cable end | Basic reference, to be completed by adding the voltage code ⁽³⁾ | Weight |
|---|-------|-------|----------------------------------|-----|--------------------------------|--|--------|
| 220 V | 400 V | 660 V | N/O | N/C | N.m | | kg |
| kVAR | kVAR | kVAR | | | | | |
| 6.7 | 12.5 | 18 | 1 | 2 | 1.7 | LC1 DFK•• | 0.430 |
| 8.5 | 16.7 | 24 | 1 | 2 | 1.7 | LC1 DGK•• | 0.450 |
| 10 | 20 | 30 | 1 | 2 | 2.5 | LC1 DLK•• | 0.600 |
| 15 | 25 | 36 | 1 | 2 | 2.5 | LC1 DMK•• | 0.630 |
| 20 | 33.3 | 48 | 1 | 2 | 5 | LC1 DPK•• | 1.300 |
| 25 | 40 | 58 | 1 | 2 | 5 | LC1 DTK•• | 1.300 |
| 40 | 60 | 92 | 1 | 2 | 9 | LC1 DWK12•• | 1.650 |

Switching of multiple-step capacitor banks (with equal or different power ratings)

The correct contactor for each step is selected from the above table, according to the power rating of the step to be switched.


Example: 50 kVAR 3-step capacitor bank. Temperature: 50 °C and U = 400 V or 440 V. One 25 kVAR step: contactor LC1 DMK, one 15 kVAR step: contactor LC1 DGK, and one 10 kVAR step: contactor LC1 DFK.

(1) Operational power of the contactor according to the scheme on the page opposite.


(2) The average temperature over a 24-hour period, in accordance with standards IEC 60070 and 60831 is 45 °C.

(3) Standard control circuit voltages (the delivery time is variable, please consult your Regional Sales Office):

| Volts | 24 | 48 | 120 | 220 | 230 | 240 | 380 | 400 | 415 | 440 |
|----------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|
| 50/60 Hz | B7 | E7 | G7 | M7 | P7 | U7 | Q7 | V7 | N7 | R7 |

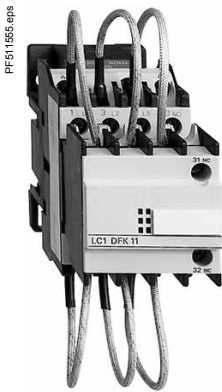

LC1 DFK11••

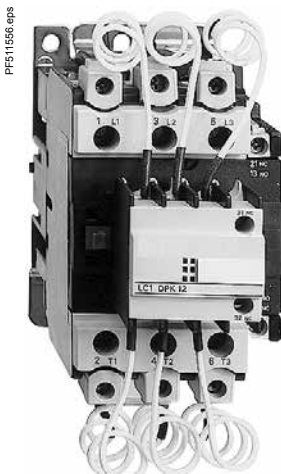


LC1 DPK12••

TeSys contactors


For switching 3-phase capacitor banks,
used for power factor correction

Dimensions


LC1 DFK, DGK

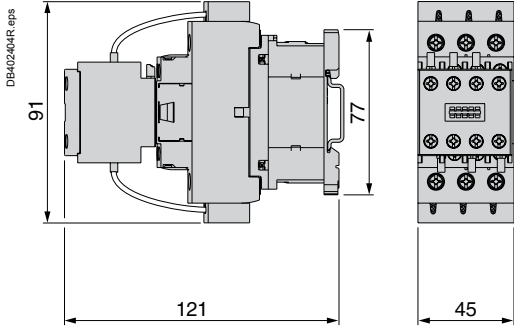


LC1 DLK, DMK

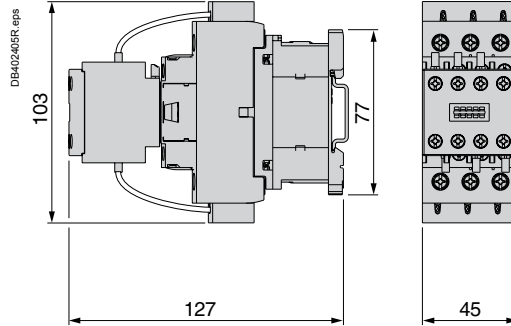

LC1 DPK, DTK

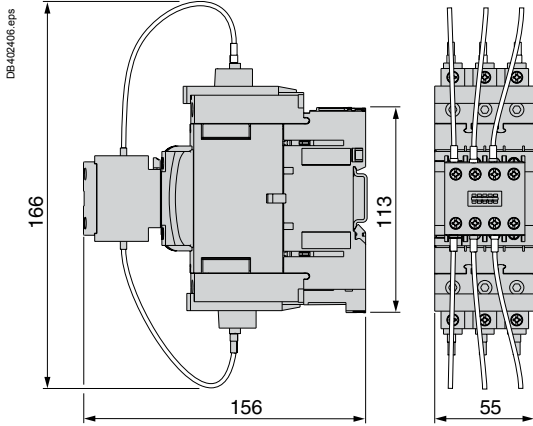


LC1 DWK

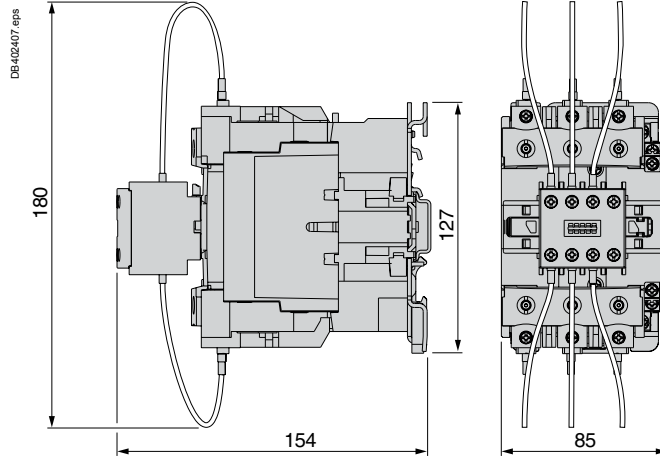

Schemes

LC1 D•K

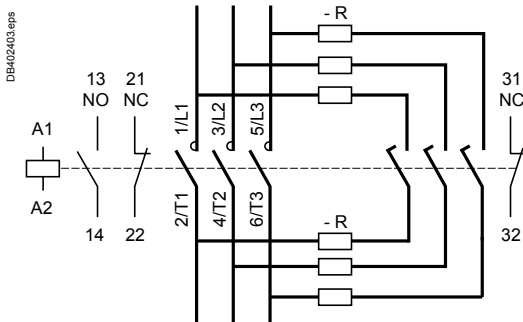

R = Pre-wired resistor connections.

| | |
|--|----|
| <i>Presentation</i> | |
| <i>Power Factor Correction guideline</i> | 3 |
| <i>Low Voltage capacitors</i> | 15 |
| <i>Detuned reactors</i> | 43 |
| <i>Power Factor controllers</i> | 49 |
| <i>Contactors</i> | 57 |
| | |
| Influence of harmonics in electrical installations | 62 |
| Safety features | 63 |
| Protection Devices in APFC Panel | 64 |
| Find more about Power Quality Solutions | 65 |
| Glossary | 66 |
| Relevant documents | 66 |

Influence of harmonics in electrical installations



Since the harmonics are caused by non-linear loads, an indicator for the magnitude of harmonics is the ratio of the total power of non-linear loads to the power supply transformer rating.

This ratio is denoted N_{LL} , and is also known as G_h/S_n :

$$N_{LL} = \text{Total power of non-linear loads } (G_h) / \text{Installed transformer rating } (S_n)$$

Example:

- > Power supply transformer rating: $S_n = 630 \text{ kVA}$
- > Total power of non-linear loads: $G_h = 150 \text{ kVA}$
- > $N_{LL} = (150/630) \times 100 = 24 \%$.

Definition of harmonics

The presence of harmonics in electrical systems means that current and voltage are distorted and deviate from sinusoidal waveforms. Harmonic currents are currents circulating in the networks and whose frequency is an integer multiple of the supply frequency. Harmonic currents are caused by non-linear loads connected to the distribution system. A load is said to be non-linear when the current it draws does not have the same waveform as the supply voltage. The flow of harmonic currents through system impedances in turn creates voltage harmonics, which distort the supply voltage.

The most common non-linear loads generating harmonic currents use power electronics, such as variable speed drives, rectifiers, inverters, etc. Loads such as saturable reactors, welding equipment, and arc furnaces also generate harmonics. Other loads such as inductors, resistors and capacitors are linear loads and do not generate harmonics.



Effects of harmonics

Capacitors are particularly sensitive to harmonic currents since their impedance decreases proportionally to the order of the existing harmonics. This can result in capacitor overload, constantly shortening its operating life. In some extreme situations, resonance can occur, resulting in an amplification of harmonic currents and a very high voltage distortion.



To ensure good and proper operation of the electrical installation, the harmonic level must be taken into account in selecting power factor correction equipment. A significant parameter is the cumulated power of the non-linear loads generating harmonic currents.

Taking account of harmonics

The percentage of non-linear loads N_{LL} is a first indicator for the magnitude of harmonics. The proposed selection of capacitors depending on the value of N_{LL} is given in the diagram below.

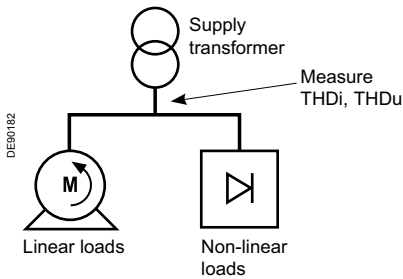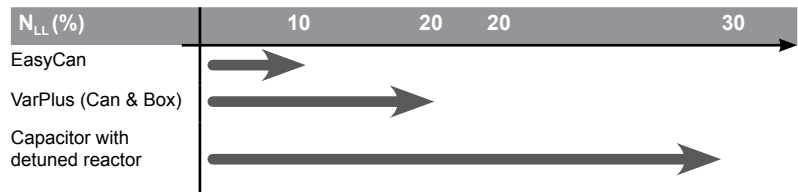

A more detailed estimation of the magnitude of harmonics can be made with measurements. Significant indicators are current harmonic distortion THDi and voltage harmonic distortion THDu, measured at the transformer secondary, with no capacitors connected. According to the measured distortion, different technologies of capacitors shall be selected:

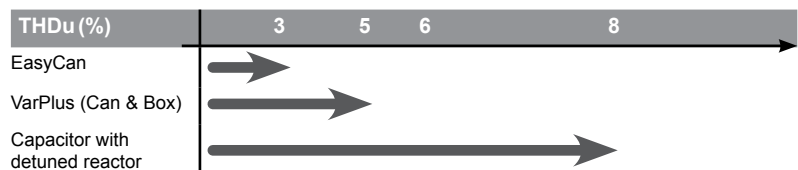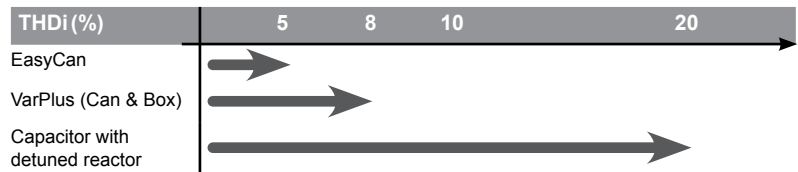

The capacitor technology has to be selected according to the most restrictive measurement.

Example, a measurement is giving the following results :

- THDi = 15 % Harmonic solution.
- THDu = 3.5 % VarPlus solution.

Harmonic solution has to be selected.

Safety features



Figure 1 - (a) Metal layer - (b) Polypropylene film.



Figure 2






Figure 3

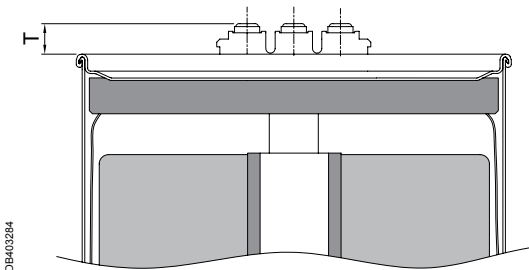

Pressure Sensitive Disconnecter (also called 'tear-off fuse'): this is provided in each phase of the capacitor and enables safe disconnection and electrical isolation at the end of the life of the capacitor.

Malfunction will cause rising pressure inside the can. Pressure can only lead to vertical expansion by bending lid outwards. Connecting wires break at intended spots. Capacitor is disconnected irreversibly.

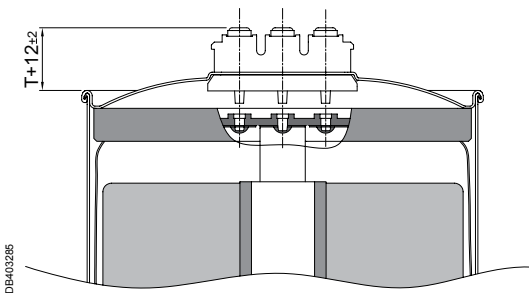

Cross-section view of a three-phase capacitor after Pressure Sensitive Device operated: bended lid and disconnected wires.

Protection Devices in APFC Panel

Over voltage

In the event of an over voltage, electrical stress on the capacitor dielectric and the current drawn by the capacitors will increase. The APFC equipment must be switched off in the event of over voltage with suitable over voltage relay / surge suppressor.

Over Current

Over current condition is harmful to all current carrying components. The capacitor bank components must be rated based on the maximum current capacity. A suitable over current relay with an alarm function must be used for over current protection.

Short circuit protection

Short circuit protection at the incomer of the capacitor bank must be provided by devices such as MCCB's and ACB's. It is recommended to use MCB or MCCB for short circuit protection at every step.

Thermal Overload

A thermal overload relay must be used for over load protection and must be set at 1.3 times the rated current of capacitors (as per IEC 60831).

In case of de tuned capacitor banks, the over load setting is determined by the maximum over load capacity of the de tuning reactor. (1.12 = 4.2(14%), 1.19 = 3.8(7%), 1.3 = 2.7(5.7%)).

If MCCB's are not present, it is recommended to use a thermal overload relay with the stage contactor to make sure the stage current does not exceed its rated capacity.

Over Temperature protection

The APFC controller must be tripped with the help of thermostats in cases the internal ambient temperature of the capacitor bank exceeds the temperature withstand characteristics of the capacitor bank components. Reactors are provided with thermal switches and can be isolated in the case of over temperature conditions.

Find more about Power Quality Solutions

We deliver smart & cost-effective Power quality solutions to improve our customers' efficiency

VarSet

Low Voltage Capacitor Banks

Energy efficiency, as simple as VarSet



Find out more visit www.schneider-electric.com and download [PFCED310004EN](#)



AccuSine PCS+

Harmonic Filtering and Reactive Power Compensations

The Schneider Electric solution for active harmonic filtering in industrial and building installations



Find out more visit www.schneider-electric.com and download [AMTED109015EN](#)



Active current (I_a):

In the vector representation, component of the current vector which is co-linear with the voltage vector.

Active power:

Real power transmitted to loads such as motors, lamps, heaters, computers, and transformed into mechanical power, heat or light.

Apparent power:

In a circuit where the applied r.m.s. voltage is V_{rms} and the circulating r.m.s. current is I_{rms} , the apparent power S (kVA) is the product: $V_{rms} \times I_{rms}$. The apparent power is the basis for electrical equipment rating.

Detuned reactor:

Reactor associated to a capacitor for Power Factor Correction in systems with significant non-linear loads, generating harmonics. Capacitor and reactor are configured in a series resonant circuit, tuned so that the series resonant frequency is below the lowest harmonic frequency present in the system.

Displacement Power Factor:

For sinusoidal voltage and current with a phase angle φ , the Power Factor is equal to $\cos\varphi$, called Displacement Power Factor (DPF)

Harmonic distortion:

Indicator of the current or voltage distortion, compared to a sinusoidal waveform.

Harmonics:

The presence of harmonics in electrical systems means that current and voltage are distorted and deviate from sinusoidal waveforms. Harmonic currents and voltages are signals circulating in the networks and which frequency is an integer multiple of the supply frequency.

IEC 60831-1:

"Shunt power capacitors of the self-healing type for a.c. systems having a rated voltage up to and including 1 000 V – Part 1: General – Performance, testing and rating – Safety requirements – Guide for installation and operation".

In-rush current:

High-intensity current circulating in one piece of equipment after connection to the supply network.

kVA demand:

Maximum apparent power to be delivered by the Utility, which determines the rating of the supply network and the tariff of subscription.

Polypropylene:

Plastic dielectric material used for the construction of low-voltage capacitors.

Power Factor:

The power factor λ is the ratio of the active power P (kW) to the apparent power S (kVA) for a given circuit.

$$\lambda = P \text{ (kW)} / S \text{ (kVA)}.$$

Power Factor Correction:

Improvement of the Power Factor, by compensation of reactive energy or harmonic mitigation (reduction of the apparent power S , for a given active power P).
Rated current:

Current absorbed by one piece of equipment when supplied at the rated voltage.

Rated voltage:

Operating voltage for which a piece of equipment has been designed, and which can be applied continuously.

Reactive current (I_r):

Component of the current vector which is in quadrature with the voltage vector.

Reactive power:

Product of the reactive current times the voltage.

Service voltage:

Value of the supply network voltage, declared by the Utility

Service current:

Amplitude of the steady-state current absorbed by one piece of equipment, when supplied by the Service Voltage.

Usual formulas:

$$\text{Apparent power: } S = V_{rms} \times I_{rms} \text{ (kVA).}$$

$$\text{Active power: } P = V_{rms} \times I_a = V_{rms} \times I_{rms} \times \cos\varphi \text{ (kW).}$$

$$\text{Reactive power: } Q = V_{rms} \times I_r = V_{rms} \times I_{rms} \times \sin\varphi \text{ (kvar).}$$

Voltage sag:

Temporary reduction of the supply voltage magnitude, between 90 and 1 % of the service voltage, with a duration between 1/2 period and

Relevant documents

Relevant documents published by Schneider Electric

- Electrical Installation Guide.
- Expert Guide n°4: "Harmonic detection & filtering".
- Expert Guide n°6: "Power Factor Correction and Harmonic Filtering Guide"
- Technical Guide 152: "Harmonic disturbances in networks, and their treatment".
- White paper: controlling the impact of Power Factor and Harmonics on Energy Efficiency.

Relevant websites

- <http://www.schneider-electric.com>
- <https://www.solution-toolbox.schneider-electric.com/segment-solutions>
- <http://engineering.electrical-equipment.org/>
- <http://www.electrical-installation.org>

Relevant standards

- IEC 60831 - Shunt power capacitors of the self healing for a.c. systems up to 1000V
- IEC 61642 - Application of filters and shunt capacitors for industrial a.c. networks affected by harmonics
- IEC 61921 - Power capacitors-low voltage power factor correction capacitor banks

Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
92506 Rueil Malmaison Cedex
France

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

As standards, specifications and designs change from time to time, please ask for confirmation of the information given in this publication.



This document has been printed on ecological paper

Design: Schneider Electric
Photos: Schneider Electric
Edition: Altavia Connexion - made in France

